



The better workstation

Complete overview





3D online configurator – for the optimal workstation

- Configuration according to your individual preferences
- Direct quote request via the configurator
- Innovative and intuitive system
- Detailed product understanding
- Realistic visualisation

Your ergonomic and process-optimised workbench is just a few clicks away

Thanks to the 3D product configurator, ERGO-line customers can quickly and easily design their own custom work tables. The configurator includes all table models, in all shape, size and material variants. Test the configurator and send us a quotation request.



About us				from pag	je 4
Core competencies Service	6	Ergonomics ESD protection	12 16	Applications	20
Table frames				from page	24
Overview	24	ERGO-Flex	42	ERGO-Office	50
ERGO-Basic	28	ERGO-Forte	44	ERGO-Tower	52
ERGO-Vario	38	ERGO-Budget	46	ERGO-Mont	54
ERGO-Vario Plus	40	ERGO-Light 2	48		
Worktops				from page	56
Worktops	56				
Shelves	59				
Add-on units	& a	ccessories		from page	62
Drawers	62	EDP	72	Floor mats	86
Add-on units	64	Holders and containers	75	Light	88
Shelves	66	Mail sorting system	78	Lifting element/Power	92
Swivel arms	70	Chairs	82	ESD	94
Feed/materia	l su	pply		from page	96

SLZ

Free-standing add-on units

from page 104

Free-standing add-on units 104 Hook system for perforated panel 108
Free-standing add-on units –
perforated panel 106

Trolleys from page 114

Cutting tools

from page 118



ERGO-line: workstations with a system

As a successful family business, Kern Studer AG focuses on consistency and innovation. Our values are part of our corporate culture and have a direct influence over the product and service offering provided by Kern Studer AG. The ERGO-line brand initially arose as a result of own employees' need to optimise manual and physically demanding processes.

What we mean by a modern work system: optimal ergonomics, flexibility, and functionality – while adhering to strict quality requirements. Decades of experience in production and optimised workstation design have gone into ERGO-line workstation systems. The in-house testing of our products and our close relationships with our customers allow us to optimally address specific needs and set new standards on all levels.

Get to know us and our products – we will be happy to advise you.

About us

Based on the concept of optimising manual processes, not only digitally but also physically, ERGO-line was born as a new product branch of Kern Studer AG. Today, a team of several people works under the ERGO-line brand with the goal of offering customers innovative and flexible workstation systems.



HERE'S WHAT WE STAND FOR AS A TEAM:

- Quality
- Enthusiasm
- Engagement
- Competence
- Reliability

Satisfied customers are our best recommendation

Our customers are at the centre of all that we do. An important part of our business philosophy is to build longterm and reliable partnerships. The satisfaction of our clientele is particularly important to us, and ensures the success of our company.

Our clients are of the opinion that ERGO-line products are positioned at just the right price point. See for yourself - take a look at the customer testimonials regarding our workstation systems.











What our customers say about us:

We implemented the ERGO-line workstation solution for our Autostore facility. We are very satisfied with how the project turned out. We were able to optimise processes and create a good environment for employees, with optimal workstation design. We can recommend ERGO-line without hesitation.

Dieter Egloff, Head of Logistics & Purchasing, Peterhans AG

The on-site consultation, including high-quality visualisation, was very professional. The assembly has worked reliably and efficiently. We are fully satisfied with the services provided by ERGO-line. We were very pleased to work with such a reliable and competent partner.

Oliver Gerritson, Head of Operations, Connect Com AG

Thanks to the diverse and extensive range of products, we were able to design our work tables in the incoming and outgoing goods areas at our new automated picking warehouse according to our own design ideas. The communication and consultation was to our complete satisfaction. We were very pleased to be cooperating with such a competent and reliable partner in ERGO-line.

Jens Pfister, Outgoing Area Warehouse Supervisor, Europe Chemi-Con GmbH



OUR EXPERIENCE

Based on numerous national and international projects, we have been able to build up a unique wealth of knowledge, with core competencies around the topic of workstation systems. Here is what we offer our customers:

- A combination of experience and enthusiasm for further development
- Practice-oriented and thoroughly tested product range
- Personal advice and support from employees with many years of experience



STANDARD PRODUCT RANGE

ERGO-line offers a comprehensive standard product range, in its cost-effective modular system. All products are compatible and have a uniform appearance. With over 100 additional components, your workstation remains expandable and customisable at all times.

- Complete system with over 100 additional components
- Expandable or customisable at any time
- Short delivery times

Surfaces



Standard colours:

RAL 9006 white aluminium combined with RAL 7016 anthracite grey




Special colours on request.

IN-HOUSE MANUFACTURING

Thanks to its own in-house development and production, ERGO-line produces workstations that boast the highest quality standards throughout Europe. In this process, our product range is constantly being developed and expanded according to the latest trends.

Benefit from our expertise as a manufacturer and let our long-standing employees advise you.

- In-house development and manufacturing
- Consistent system construction
- Directly from the manufacturer

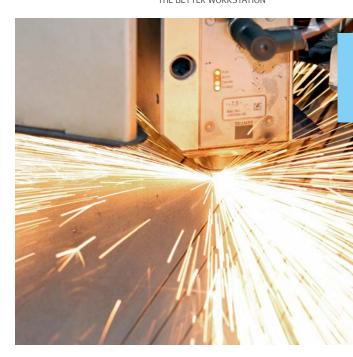

Your advantages at a glance

SPECIAL CUSTOM DESIGNS

As a manufacturer, ERGO-line specialises in unique, custom-made products. Customised workstation systems, tailored to your process, are our strength.

Using to local production facilities, we quickly and reliably manufacture custom solutions, even in small quantities.

- Tailor-made custom solutions
- Even in a small quantities
- In close cooperation with our customers



CONSULTING

Would you like some expert advice? We accompany you from the initial idea, through to the planning and execution. Our many years of experience, together with our comprehensive expertise, are at your disposal.

Our service - competent advice, including on site

- Personal customer service
- Showroom with application examples
- Consulting in the fields of process optimisation, ergonomics, and ESD protection





In the beginning there is always an idea...

Workstations must be optimally tailored to and aligned with the task process. Workstation systems in a wide variety of designs can be tailored to your operation. Let us inspire you in our showroom and convince you of the quality of our products.





From consulting to planning...

To implement your project successfully and economically, systematic planning is essential. You will receive competent support from the ERGO-line team.

In the form of an overall concept, we will draw up a detailed offer for you, with realistic 3D visualisations and a corresponding implementation proposal.

PLANNING

- Creation of an overall concept
- Detailed offer creation
- Realistic 3D visualisations







EXECUTION


- Fast order processing and delivery times
- Preparation of sample tables for large projects
- Pre-assembled tables for easy and quick self-assembly
- Assembly by our own trained fitters



From planning to realisation...

When it comes to the realisation of your project, we impress with quick order processing and short delivery times. All our table frames are pre-assembled and can be quickly and easily self-assembled. For large projects, a sample table will be produced for you. This allows you to test your workstation and make final adjustments as needed. Of course, we also offer an installation service, provided by our own trained installation team.



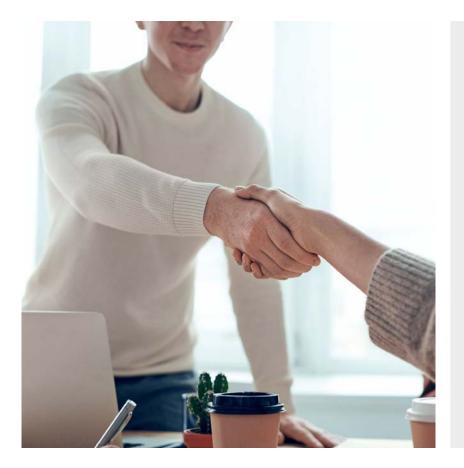

From realisation to partnership...

We value long-term partnerships that are built on trust. Business cooperation and partnership relations promote the growth of both parties. We also remain available following successful project execution. We will be happy to provide support at any time, in the form of the uncomplicated and rapid redesign or adaptation of your workstations.

What's more, we offer a wide range of replacement/ supplementary products which we keep in stock.

LONG-STANDING PARTNERSHIP


- There to support you, even after successful project execution
- Spare/supplementary products in stock
- Uncomplicated redesign of the workstation, thanks to our modular system



Choosing the right table frame forms the basis for ensuring perfect ergonomics in the workplace. ERGO-line offers all its table frames with three types of infinite height adjustment for fatigue-free working. What type of height adjustment you opt for depends on your requirements and work processes.

Height adjustment via:

- Clamping screws
- Hand crank
- Electric with memory function

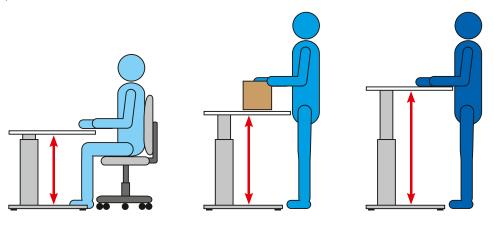

Ergonomics pays off

Good employees are valuable – in light of this, designing the optimum workplace makes twice as much sense. An ergonomically designed and equipped table combined with well thought-out work organisation forms the basis for a modern packing or assembly workstation.

This not only enhances the satisfaction and health of the workforce; it also increases productivity!

Height adjustment

Whether you opt for infinite adjustment via clamping screws, hand crank or electric motor depends on the requirements and processes concerned. Standing/sitting workstations, shift work operations, as well as the size and weight of the parts demand flexible working heights.

All tables are equipped with levelling feet to guarantee optimum alignment.













Workstation floor mats/work chairs

Stress and strain in the workplace is greater than we think. To prevent premature leg fatigue, joint pains, cold feet or spinal problems, the workstation floor mats are precisely the right addition.

«Ergonomics means not only purchasing components but, rather, also matching and coordinating them!»

Ask us now





Tilting shelves

Simple shelves and shelves with screwed brackets are clipped into the perforated profiles and are easily height adjustable. The access height and tilting angle of the shelves guarantee optimum, fatigue-free access at all times.

Lifting element

The lifting element is the perfect add-on for the packing table. Particularly suitable for large packages – where it is hard work for the packaged goods to be packed into the box from above. This is energy-sapping over the longer term and is not ergonomic. With the lifting element, you can lower the packing level to a convenient height in seconds and, as soon as the package has been completed, it is raised up and the packing process is finished.







ESD workstations: protection at the highest level

In the electronics industry in particular, it is of vital importance that electrostatic charges are kept away from electronics workstations. Careful and comprehensive planning is extremely important, both for ESD protection zones for individual workstations and for ESD protected areas (EPA), Here, it is essential that you adhere strictly to measures aiming to provide comprehensive protection against ESD during the transport, production and storage of electronic components.

Essentially, all objects such as the furniture, but also the personnel within the protection zone (EPA), should be conductive and earthed accordingly.

All products offered by ERGO-line meet the requirements of IEC 61340-5-1, the European ESD standard.

ESD protection



ESD protection with **ERGO**-line

Although ESD usually looks harmless, it can cause damage to electronic components and assemblies, with serious consequences. With a well-planned ESD workstation, you reduce risks and costs. ESD protection can promote a positive corporate image, while protecting against financial loss. Often, damage caused by ESD is only noticed by the customer.

All objects must have regular contact with the earth. This is realised by the employee, who discharges the charges into the ground by means of touching or direct contact. Prevent ESD damage so as to avoid high scrap, quality, and repair costs.



All table frames, accessories, and transport trolleys are powder-coated in dissipative paint, according to IEC 61340-5-1.

ELEMENTS OF AN ESD WORKSTATION

- ESD equipment: tables, chairs, worktops, personal earthing, measurement equipment, tools, markings, flooring, packaging, transportation and storage
- ESD clothing: shoes, gloves, wristbands and other accessories
- ESD conduct: training and rules for employees
- ESD tools: pliers, screwdrivers, tweezers
- ESD cleaning: cleanliness is important, as dust and dirt isolate charges

ESD protection made easy:





Earthing



ESD flooring



ESD work table



Earthing point



ESD drawer unit



ESD chair



ESD transport trolley



ESD container




EPA sign

ESD protection zone planning

There are various options when planning your ESD protection zone, the so-called EPA (Electrostatic Protected Area). ERGO-line offers the necessary components, dividing the ESD protection zones into the following variants:








Variant 1 - ESD work mat

The ESD work mat on the non-conductive table. The ESD wrist strap is connected to the work mat, and this is earthed.

• ESD accessories page 95

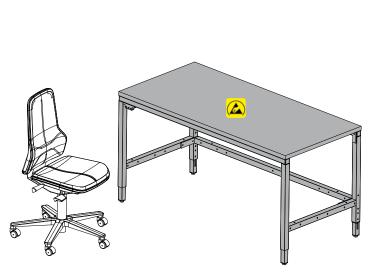





Variant 2 - ESD workstation

The table frame, which is powder-coated with conductive properties as standard for ERGO-line, is equipped with an ESD worktop. The ESD wrist strap is connected to the ESD earthing module and the table frame is earthed.

- ESD worktops page 56
- ESD accessories page 95



PRINCIPLES OF ESD PROTECTION: Symbol explanation

- Assume that all components are ESD sensitive
- Only touch electronic components within the ESD protection zone (EPA)
- Only store and transport ESD-sensitive components in ESD protective containers
- Regular inspection of the ESD protection system



Table earthing




Earthing module



Building earthing



ESD protected

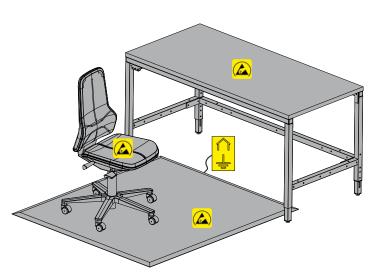







Variant 3 - ESD island solution

ESD workstation as variant 2, also available with ESD floor mat, which is earthed, and the ESD work chair with ESD castors.

- ESD worktops page 56
- ESD accessories page 95
- Work chairs page 82
- Floor mats page 86

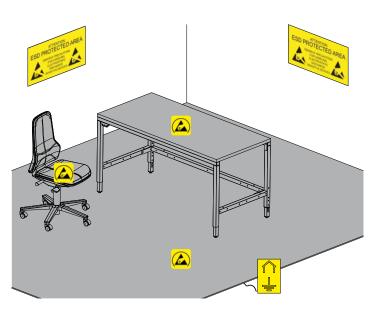





Variant 4 - Complete ESD protection zone (EPA)

The complete ESD protection zone provides optimum protection. This is recommended if you have multiple workstations.

- ESD worktops page 56
- ESD accessories page 95
- Work chairs page 82
- Floor mats page 86

ERGO-line, for the entire production process

Whether manufacturing, goods flow or dispatch processing, ERGO-line workstation systems cover the entire industrial distribution chain (supply chain).

Our staff will advise you at various stages during the production process and will develop proposals tailored to your business.



GOODS RECEIVING & GOODS CONTROL

- Universal tables
- IT stations
- Tables for printers
- Mail sorting tables



MANUFACTURING & ASSEMBLY


- Individual workstations
- ESD workstations
- Electronics workstations
- Measuring and testing workstations
- Workbenches



Optimisation of the production process with **ERGO-**line workstation systems

Time, cost, and quality are three important pillars in production. Modern manufacturing operations address the classic requirement to provide customers with the products they need as quickly and as inexpensively as possible, at the best possible quality.

Taking these three factors into account, ERGO-line works closely alongside you to design the optimally equipped workstation for your business.





GOODS FLOW & MATERIAL SUPPLY

- Interlinked workstations
- Mobile workstations
- FIFO storage racks
- Free-standing superstructure with perforated metal plates
- Roller conveyors
- Transport trolleys
- Box and magazine trolleys
- Picking and storage carts



SHIPPING PROCESSING

- Simple packing tables
- Modular packing tables
- Packing tables with integrated filling systems
- Cutters
- Roller tables





PROCEDURE

Choose the right table frame.



Choose the worktop.
Page 56/57.



Choose your add-on units and accessories. From p. 64/65.



Your ideal configuration



		H	I I		
		ERGO-Basic	ERGO-Vario	ERGO-Vario Plus	
		Page 28/29	Page 38/39	Page 40/41	
	600 mm	•			
Depth	750 mm	•	•	•	
	900 mm	•			
	600 mm	•			
	900 mm	•			
Width	1250 mm	•	•	•	
	1600 mm	•	•	•	
	2000 mm	•	•	•	
	200 kg	0			
Load	350 kg	•	•	•	
	600 kg			•	
Height adjustment	300 mm	•	•	•	
t adjus	400 mm				
Heigh	500 mm				
ent type	Clamping screws	•	•	•	
stment	Hand crank	•	•	•	
Adjustm	Electric motor	•	•	•	
	Table combination	•			
Properties	Add-on units	•	•	•	
Prop	Movable	•	•	•	
	ESD	•	•	•	
	Your advantages	Versatile in use Various accessories Also suitable for special lengths Height variants: 605, 720, 850 mm and 720 – 1020 mm Linking of up to three table frames possible	Lightweight assembly table, ideal for work that can be carried out sitting down	Heavy-duty assembly table, suitable for feeders up to a depth of 600 mm or for holding transport trolleys transport trolleys on the table Load capacity can be extended to up to 600 kg	











	1	***	I .
ERGO-Flex	ERGO-Forte	ERGO-Light 2	ERGO-Budget
Page 42/43	Page 44/45	Page 48/49	Page 46/47
_	_	_	
-	-	_	
	•		•
•	•	•	
_	_	_	_
_	-	_	_
•	•		•
		•	
_	_		_
_	_		_
	•	•	
_		_	
_		_	
	•		•
_	_		
-	-		
•	•	•	
_	_		
-	-	•	•
•	•	•	
	•		
Wide aluminium guide, ideal for customers who prefer an aluminium solution	Heavy-duty packing table, ideal for demanding applications Height adjustment range of	Universal table with a height adjustment range of 500 mm and a maximum load capacity of 200 kg (incl.)	Pre-configured packing table available in low and high version available

Maximum load capacity on

expandable up to 600 kg

up to 400 mm

capacity of 200 kg (incl.

Also available in ESD version

• Height adjustment exclusively

superstructures)

with electric motor

Further products



ERGO-Office

The classic office desk

- √ Standing/sitting workstation
- √ Height adjustable from 620 to 1270 mm
- ✓ Load 160 kg distributed load
- √ Various accessories

Page 50/51



ERGO-Tower

Compact – Everything in the smallest space

- √ Robust tower (L = 1900 mm)
- √ Flexible equipping
- √ Various accessories
- √ Incl. electrification

Page 52/53



ERGO-Mont

• Customised solutions are

not possible

The assembly professional for ergonomic working

- √ Work surface can be tilted up to 90°
- √ Height adjustable from 810 to 1310 mm
- ✓ Load 200 kg distributed load
- √ For switch cabinets or mounting frames

Page 54/55



		13						
1	Basic frame	28	7	Perforated profile section 1450 mm	65	13	Foot switch with up/down function	92
2	Worktops	56	8	Perforated profile section 1780 mm	65	14	Carton divider shelf	68
3	Perforated panel, optional	34	9	Printer shelf	35	15	Shelf	69
4	Cross-connector for securing the add-on units	33	10	Mobile waste containers	77	16	Holder for weighing scales display	74
5	Movable drawer unit	63	11	Carton divider shelf, movable	68	17	Keyboard pull-out shelf	72
6	Seitliche Ablage	35	(12)	Lifting element electric	92	(18)	Pull-out shelf 100% extendable	72






(19)	Suspension rail	75	(25)	Cantilever arm	65	(31)	Open storage boxes
20	Perforated panel	75	26	Aluminium profile rail	65	<u>32</u>	Euro containers
21	Bottle holder	76	27	File support	67/69		
22	Suspension rail for electrical components	93	28	Shelf with screwed bracket	69		
23	Socket strip	93	29	Back board	69		
24	Workstation light	88	30	ESD accessories	95		



The basic frame of the ERGO-Basic is the perfect combination of 40 x 40 mm tubular steel and 40 x 40 mm aluminium profiles. High-quality powder coating in RAL 9006 white aluminium. Steel for stability and aluminium for flexibility.

ERGO-Basic, basic frame



ERGO-Basic, basic frame surface load 350 kg

fixed height	haight adjustable
surface load 350	kg

	fixed height 720 mm	fixed height 850 mm	height adjustable 720 – 1020 mm
Dim. (wxd)	Art. no.	Art. no.	Art. no.
600 x 600 mm	00.0606.11	00.0606.21	00.0606.31
600 x 750 mm	00.0675.11	00.0675.21	00.0675.31
600 x 900 mm	00.0609.11	00.0609.21	00.0609.31
900 x 600 mm	00.0906.11	00.0906.21	00.0906.31
900 x 750 mm	00.0975.11	00.0975.21	00.0975.31
900 x 900 mm	00.0909.11	00.0909.21	00.0909.31
1250 x 600 mm	00.1206.11	00.1206.21	00.1206.31
1250 x 750 mm	00.1275.11	00.1275.21	00.1275.31
1250 x 900 mm	00.1209.11	00.1209.21	00.1209.31
1600 x 600 mm	00.1606.11	00.1606.21	00.1606.31
1600 x 750 mm	00.1675.11	00.1675.21	00.1675.31
1600 x 900 mm	00.1609.11	00.1609.21	00.1609.31
2000 x 600 mm	00.2006.11	00.2006.21	00.2006.31
2000 x 750 mm	00.2075.11	00.2075.21	00.2075.31
2000 x 900 mm	00.2009.11	00.2009.21	00.2009.31

Cross connectors can be found on p. 33.

ERGO-Basic, extension frame



ERGO-Basic, extension frame surface load 250 kg

	fixed height 720 mm	height adjustable 720 – 1020 mm
Dim. (wxd)	Art. no.	Art. no.
600 x 600 mm	01.0606.11	01.0606.31
600 x 750 mm	01.0675.11	01.0675.31
600 x 900 mm	01.0609.11	01.0609.31
900 x 600 mm	01.0906.11	01.0906.31
900 x 750 mm	01.0975.11	01.0975.31
900 x 900 mm	01.0909.11	01.0909.31
1250 x 600 mm	01.1206.11	01.1206.31
1250 x 750 mm	01.1275.11	01.1275.31
1250 x 900 mm	01.1209.11	01.1209.31
1600 x 600 mm	01.1606.11	01.1606.31
1600 x 750 mm	01.1675.11	01.1675.31
1600 x 900 mm	01.1609.11	01.1609.31
2000 x 600 mm	01.2006.11	01.2006.31
2000 x 750 mm	01.2075.11	01.2075.31
2000 x 900 mm	01.2009.11	01.2009.31

Worktops can be found on p. 56/57.



The ERGO-Basic system is very versatile and can also be optimally adapted to the various application possibilities using the different product variations.

Example: The fixed height of 720 mm corresponds to the height of an office desk, while the fixed height of 850 mm is a good height for the standing packing table. If you want to stay flexible and set up individual workstations at different heights, we recommend the height adjustable model with clamping screws from 720 – 1020 mm.

ERGO-Basic

ERGO-Basic, corner frame



ERGO-Basic, corner frame

surface load 150 kg

fixed height 720 mm	height adjustable 720 – 1020 mm
Art. no.	Art. no.
00.1111.11	00.1111.31
00.1313.11	00.1313.31
	720 mm Art. no. 00.1111.11

Corner worktops can be found on p. 58.

NOTE

Optimum stability due to the 4 foot system

The considerable loads caused by the add-on units for the cardboard packaging, screen and printer are best supported on a 4 foot system. In this way, we guarantee you a strong and robust workstation.


Dimensions (mm):

Basic frame: Including 30 mm thick worktop




Extension frame:






Corner frame:




30

Joining basic and extension frames together has the advantage of being more economical than only working with basic frames. However, if you want to change something at a later date, you are tied to the fixed units.

Table combinations = economical Individual tables = flexible

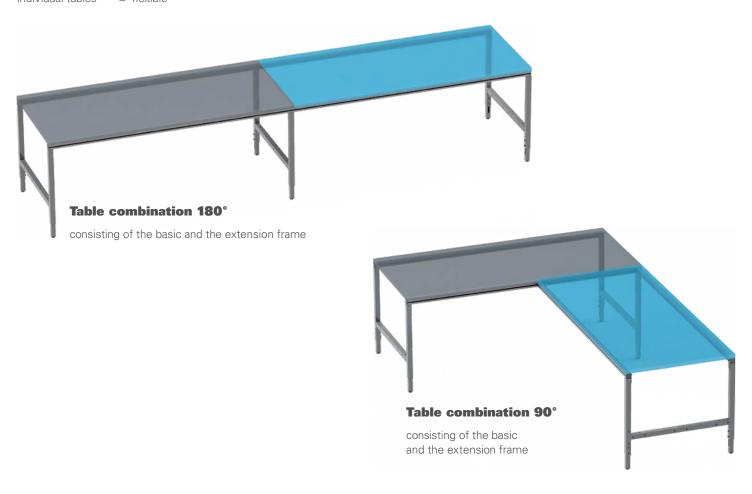

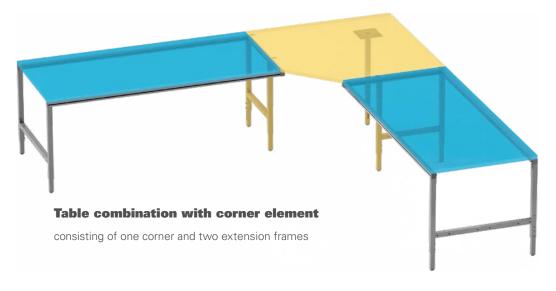

Legend:

= basic frame (p. 28)


= extension frame (p. 28)


= corner frame (p. 29)

Corner worktops can be found on p. 58.



Dimensions (mm): Including 30 mm thick worktop







ERGO-Basic with hand crank or electric height adjustment



ERGO-Basic, basic frame with hand crank height adjustable with hand crank from 720 – 1020 mm, surface load max. 350 kg

Dim. (wxd)	Art. no.
1250 x 750 mm	00.1275.41
1250 x 900 mm	00.1209.41
1600 x 750 mm	00.1675.41
1600 x 900 mm	00.1609.41
2000 x 750 mm	00.2075.41
2000 x 900 mm	00.2009.41



ERGO-Basic, basic frame with electric motor height adjustable with electric motor from 720 – 1020 mm, surface load max. 350 kg

Art. no.
00.1206.51
00.1275.51
00.1209.51
00.1606.51
00.1675.51
00.1609.51
00.2006.51
00.2075.51
00.2009.51





Left: Control unit for electric drive with memory functions

Right: Folding hand crank



ERGO-Basic table frames can be supplemented with a set of castors to create mobile tables. The castor increases the height of the base frame, which is then often too high; to prevent this from happening, ERGO-line offers a shortened base frame for ERGO-Basic.

ERGO-Basic, shortened base frame



ERGO-Basic, shortened base frame surface load 350 kg

	fixed height 605 mm	height adjustable 605 – 905 mm
Dim. (wxd)	Art. no.	Art. no.
600 x 600 mm	02.0606.11	02.0606.31
600 x 750 mm	02.0675.11	02.0675.31
600 x 900 mm	02.0609.11	02.0609.31
900 x 600 mm	02.0906.11	02.0906.31
900 x 750 mm	02.0975.11	02.0975.31
900 x 900 mm	02.0909.11	02.0909.31
1250 x 600 mm	02.1206.11	02.1206.31
1250 x 750 mm	02.1275.11	02.1275.31
1250 x 900 mm	02.1209.11	02.1209.31
1600 x 600 mm	02.1606.11	02.1606.31
1600 x 750 mm	02.1675.11	02.1675.31
1600 x 900 mm	02.1609.11	02.1609.31
2000 x 600 mm	02.2006.11	02.2006.31
2000 x 750 mm	02.2075.11	02.2075.31
2000 x 900 mm	02.2009.11	02.2009.31

ERGO-Basic, shortened base frame with hand crank



ERGO-Basic, shortened base frame with hand crank

height adjustable with hand crank from 605 – 905 mm, surface load 350 kg

Dim. (wxd)	Art. no.
1250 x 750 mm	02.1275.41
1250 x 900 mm	02.1209.41
1600 x 750 mm	02.1675.41
1600 x 900 mm	02.1609.41
2000 x 750 mm	02.2075.41
2000 x 900 mm	02.2009.41

Worktops can be found on p. 56/57.

Cross connectors can be found on p. 33.

Accessories for movable tables



Cross-connector for the ERGO-Basic table frame needed to secure the perforated profile sections for the add-on units (see p. 64)

	Basic frame	Ext. frame
Dim.	Art. no.	Art. no.
600 mm	00.3006.01	00.3106.01
900 mm	00.3009.01	00.3109.01
1250 mm	00.3012.01	00.3112.01
1600 mm	00.3016.01	00.3116.01
2000 mm	00.3020.01	00.3120.01



Castor set for movable table frame

Consisting of: 4 castors, 2 of them with brake, raises the table frame by 100/160 mm

	Standard	ESD ESD
Dim.	Art. no.	Art. no.
Ø 75 mm	00.9005.00	00.9005.09
Ø 125 mm	00.9002.00	00.9002.09

CROSS CONNECTOR APPLICATION

In the case of the base frames for ERGO Basic with a hand crank or electric motor, the cross connectors are always integrated (see page 31).

As for ERGO-Basic frames with a clamping screw, the cross connector must always be ordered separately, depending on the width of the basic frame.

Width base frame	ERGO-Basic, mobile	ERGO-Basic, stationary
600 mm		-
900 mm		-
1250 mm		•
1600 mm		•
2000 mm		



NOTE


Height increase for tables with castors:

75 series castor: 100 mm 125 series castor: 160 mm Table frame height specifications incl. 30 mm worktop.


Dimensions (mm):




Fixed height 605 mm:



Height adjustable 605 - 905 mm:



Height adjustable with hand crank:



The ERGO-Basic base frame can be used in a very versatile way. In addition, the demands on a work table in terms of flexibility and functionality are constantly on the increase. The new ERGO-line products provide additional options for the positioning of printers and create new shelf areas in a flexible way which can be fitted either on the left or right below the ERGO-Basic table frame.



Large packages are unwieldy and do not fit into any workflow. With the pull-out module, ERGO-line offers a deeper add-on work surface that can be extended as needed. An elegant solution that can replace a lifting element.

Table frame accessories




Perforated panel for the ERGO-Basic table frame visual element, colour 7016 anthracite grey, mandatory next to lifting element

Dim.	Art. no.
600 mm	00.3206.02
750 mm	00.3275.02
900 mm	00.3209.02



Axle set complete with bearing shells for use with rear-table cutting tool, max. 700 mm roll diameter

Table length	Art. no.
1250 mm	00.3812.01
1600 mm	00.3816.01
2000 mm	00.3820.01



Container drawer

including plastic container, grey, $300 \times 400 \times 210$ mm (wxdxh), fitted left or right

Art. no.	
0.4030.02	


Table frame accessories



Pull-out module for ERGO-Basic

250 mm deeper than table height, pull-out 500 x 600 mm (wxd), load capacity up to 50 kg, fitted left or right

Table depth	Art. no.
750 mm	00.5000.02
900 mm	00.5010.02



Printer shelf below table, extendable

fitted left or right, load capacity up to 20 kg, usable area $460/500 \times 550 \times 330 - 560$ mm (wxdxh)

Width shelf	460 mm	500 mm
Table depth	Art. no.	Art. no.
750 mm	00.5050.02	00.5051.02
900 mm	00.5055.02	00.5056.02



Side shelf bracket set

height adjustable from 0 – 300 mm, for shelf with a width of 450 mm, load capacity up to 30 kg, without shelf

Art. no.

00.3200.02

Order shelves separately on p. 59.




Folding side shelf

height adjustable from 0-250 mm, for shelf with a width of 450 mm, load capacity up to 40 kg, without shelf


Art. no.

00.3202.02

Order shelves separately on p. 59.



Bottom shelf for ERGO-Basic



Laboratory riser shelf

fixed height 400 mm, d = 400 mm, can be screwed to the lower table frame, without worktop


Dim.	Art. no.
1250 mm	00.1204.01
1600 mm	00.1604.01
2000 mm	00.2004.01

Shelves can be found on p. 59.


Order worktops separately on p. 58.

Dimensions (mm):


Pull-out module:




Printer shelf below table:




Side shelf bracket set: Including 30 mm thick worktop



Folding side shelf: Including 30 mm thick worktop



Dimensions of bottom shelf:



Flexible, extendable, ergonomic...

ERGO-Basic is always a good fit! A sturdy system that is at home in many areas and offers an excellent price-performance ratio.

The system provides a lot of possibilities for the setting-up of a workstation, with due regard for the requirements concerning ergonomics and flexibility.










Discover ERGO-Basic

- ✓ Customised solution with standard components
- ✓ Expandable and adaptable at any time
- ✓ Modern look

ERGO-Basic has everything you need!

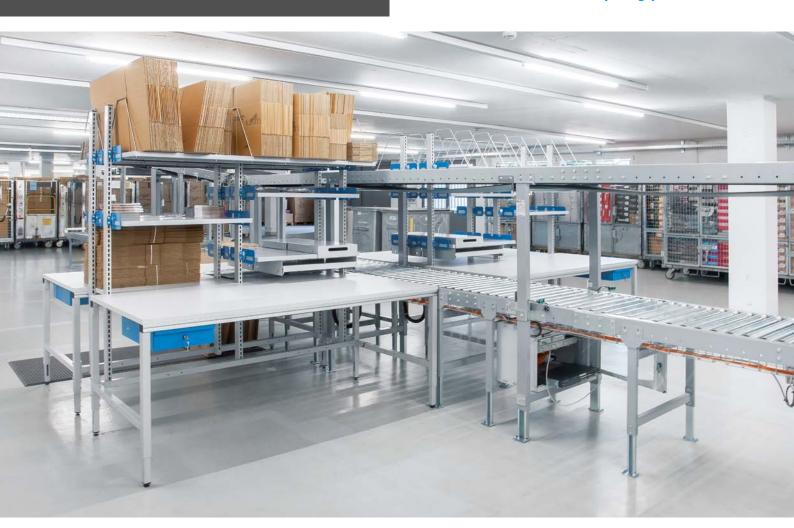



Robust design made of 40×40 mm tubular steel combined with a sturdy rear C-profile to support the addon units. 40×40 mm aluminium profile sections are used at the top to hold the worktops and for securing the drawers. High-quality powder coating in RAL 9006 white aluminium.


ERGO-Vario



ERGO-Vario, basic frame height infinitely adjustable from 720 – 1020 mm with the clamping screw, surface load 350 kg


Dim. (wxd)	Art. no.
1250 x 750 mm	03.1275.31
1600 x 750 mm	03.1675.31
2000 x 750 mm	03.2075.31

ERGO-Vario with hand crank or electric motor



ERGO-Vario, basic frame with hand crank height adjustable with hand crank from 720 – 1020 mm, surface load 350 kg

Dim. (wxd)	Art. no.
1250 x 750 mm	03.1275.41
1600 x 750 mm	03.1675.41
2000 x 750 mm	03.2075.41



ERGO-Vario, basic frame with electric motor height adjustable with electric motor from 720 – 1020 mm, surface load 350 kg

Dim. (wxd)	Art. no.
1250 x 750 mm	03.1275.51
1600 x 750 mm	03.1675.51
2000 x 750 mm	03.2075.51

Worktops can be found on p. 56/57.



The ERGO-Vario basic frame serves as a base for light assembly tables with lower requirements concerning bearing capacity and height adjustment. Maximum bearing capacity 350 kg and height adjustable from 720-1020 mm in the models with the hand crank and electric motor. The table model with the clamping screw is adjustable from 720-1020 mm.

ERGO-Vario

Accessories



Perforated panel for the ERGO-Vario table frame visual element, colour RAL 7016 anthracite grey

Dim.	Art. no.
750 mm	03.3207.02




Footrest, ERGO-Vario/ERGO-Vario Plus can be tilted to any angle and is sideways adjustable, incl. cross-connector for 3 table widths

Dim.	Art. no.
1250 mm	03.3412.01
1600 mm	03.3416.01
2000 mm	03.3420.01

Dimensions (mm): Including 30 mm thick worktop










Left: Control unit for electric drive with memory functions

Right: Folding hand crank



Robust design made of 80 x 50 mm tubular steel combined with a sturdy rear C-profile to support the add-on units. 40 x 40 mm aluminium profile sections are used at the top to hold the worktops and for securing the drawers. High-quality powder coating in RAL 9006 white aluminium.


ERGO-Vario Plus



ERGO-Vario Plus, basic frame height adjustable from 720 – 1020 mm, in 25:25 mm increments, surface load 350 kg

Dim. (wxd)	Art. no.
1250 x 750 mm	04.1275.31
1600 x 750 mm	04.1675.31
2000 x 750 mm	04.2075.31

ERGO-Vario Plus with hand crank or electric motor



ERGO-Vario Plus, basic frame with hand crank height adjustable with hand crank from 720 – 1020 mm, surface load 350 kg

Dim. (wxd)	Art. no.
1250 x 750 mm	04.1275.41
1600 x 750 mm	04.1675.41
2000 x 750 mm	04.2075.41





ERGO-Vario Plus, basic frame with electric motor height adjustable with electric motor from 720 – 1020 mm, surface load 350 kg

Dim. (wxd)	Art. no.
1250 x 750 mm	04.1275.51
1600 x 750 mm	04.1675.51
2000 x 750 mm	04.2075.51

Worktops can be found on p. 56/57.

Dimensions (mm): Including 30 mm thick worktop





The ERGO-Vario Plus basic frame is the ideal solution for standing/sitting workstations. Thanks to a high-quality guide rail, the table is also very strong and stable with the height fully extended. The table is fitted with an adjustment range of 300 mm as standard. This can be extended to

Accessories



400 mm on request.

Perforated panel for the ERGO-Vario Plus table frame visual element, colour RAL 7016 anthracite grey

Dim.	Art. no.
750 mm	04.3207.02




Side shelf bracket set without shelf

Art. no. 04.3200.02

Order shelves separately on p. 59.

Side shelf:





Footrest, ERGO-Vario/ERGO-Vario Plus can be tilted to any angle and is sideways adjustable, incl. cross-connector for 3 table widths

Dim.	Art. no.
1250 mm	03.3412.01
1600 mm	03.3416.01
2000 mm	03.3420.01






Left: Control unit for electric drive with memory functions

Right: Folding hand crank



Stable structure comprising the lateral aluminium guides, which are connected via a sturdy crossbeam. 40 x 40 mm aluminium profile sections are used at the top to hold the worktops and for securing the drawers. High-quality powder coating in RAL 9006 white aluminium.

ERGO-Flex with hand crank or electric motor



ERGO-Flex, basic frame with hand crank height adjustable with hand crank from 720 – 1020 mm, surface load 350 kg

	THE STATE OF THE S
▝▜▊▜▍▎	
	

ERGO-Flex, basic frame with electric motor height adjustable with electric motor from 720 – 1120 mm, surface load 400 kg


Dim. (wxd)	Art. no.
1250 x 750 mm	08.1275.41
1600 x 750 mm	08.1675.41
2000 x 750 mm	08.2075.41


Dim. (wxd)	Art. no.
1250 x 750 mm	08.1275.51
1600 x 750 mm	08.1675.51
2000 x 750 mm	08.2075.51

Worktops can be found on p. 56/57.

The ERGO-Flex basic frame is the ideal solution for tables designed for universal use. Thanks to an aluminium guide mechanism positioned in the middle, it can easily be operated from both sides. The table is fitted with an adjustment range of 300/400 mm as standard.

Dimensions (mm): Including 30 mm thick worktop










Left: Control unit for electric drive with memory functions


Right: Folding hand crank

Accessories




Cross connector for rear superstructure consisting of 1 cross connector and fixing materials

Dim.	Art. no.
1250 mm	08.3012.01
1600 mm	08.3016.01
2000 mm	08.3020.01




Cross connector for bottom shelf consisting of 2 cross connectors and fixing materials

Dim.	Art. no.
1250 mm	08.3012.02
1600 mm	08.3016.02
2000 mm	08.3020.02









Perforated profile sections on p. 65.

Shelves can be found on p. 59.



The ERGO-Forte basic frame is the ideal solution for heavy, stable workstations. Thanks to a high-quality guide rail, the table is also very strong and stable with the height fully extended. It is fitted with an adjustment range of 300 mm as standard. This can be extended to 400 mm on request.

Robust design made of 80 x 50 mm tubular steel combined with a sturdy rear C-profile to support the add-on units. $40 \times 40 \text{ mm}$ aluminium profile sections are used at the top to hold the worktops and for securing the drawers. High-quality powder coating in RAL 9006 white aluminium.

ERGO-Forte



ERGO-Forte, basic frame

height adjustable from 720 – 1020 mm in 25:25 mm increments with the clamping screw, surface load 350 kg

Dim. (wxd)	Art. no.
1250 x 750 mm	07.1275.31
1600 x 750 mm	07.1675.31
2000 x 750 mm	07.2075.31
1250 x 900 mm	07.1209.31
1600 x 900 mm	07.1609.31
2000 x 900 mm	07.2009.31

ERGO-Forte with hand crank or electric motor



ERGO-Forte, basic frame with hand crank

height adjustable with hand crank from 720 – 1020 mm, surface load 350 kg

Dim. (wxd)	Art. no.
1250 x 750 mm	07.1275.41
1600 x 750 mm	07.1675.41
2000 x 750 mm	07.2075.41
1250 x 900 mm	07.1209.41
1600 x 900 mm	07.1609.41
2000 x 900 mm	07.2009.41



ERGO-Forte, basic frame with electric motor


height adjustable with electric motor from 720 – 1020 mm, surface load 350 kg

Dim. (wxd)	Art. no.
1250 x 750 mm	07.1275.51
1600 x 750 mm	07.1675.51
2000 x 750 mm	07.2075.51
1250 x 900 mm	07.1209.51
1600 x 900 mm	07.1609.51
2000 x 900 mm	07.2009.51

Worktops can be found on p. 56/57.




Accessories




Perforated panel for the ERGO-Forte table frame visual element, colour RAL 7016 anthracite grey

Dim.	Art. no.
750 mm	07.3275.02
900 mm	07.3209.02



PC holder for ERGO-Forte table frame

Dim. (wxd)	Art. no.
200 x 440 mm	04.3500.01




Bottom shelf for ERGO-Forte


Various shelves can be found on p. 59.

ERGO-Forte



Dimensions (mm): Including 30 mm thick worktop









Left: Control unit for electric drive with memory functions

Right: Folding hand crank

ERGO-Budget packing table with direct installation

The economical solution, as a complete packing table, can be extended using system components.

ERGO-Budget



• Height adjustable from 750 - 950 mm as standard

- Sturdy steel structure
- Worktop 30 mm melamine coated RAL 7035 light grey with ABS edging
- 1350/1750 mm long shelf and carton divider shelf

Complete packing tables



ERGO-Budget packing table, high with single drawer, back board, shelf and carton divider shelf, high version, surface load 200 kg

Dim. (wxd)	Art. no.
1600 x 900 mm	E0.9116.31
2000 x 900 mm	E0.9120.31



ERGO-Budget packing table, high

with shelf, carton divider shelf, roll holder and rear-table cutting tool for roll material 125/150 cm wide, high version, surface load 200 kg

Dim. (wxd)	Art. no.
1600 x 900 mm	E1.9116.31
2000 x 900 mm	E1.9120.31



ERGO-Budget packing table, low

with single drawer, back board and shelf, low version, surface load 200 kg

Dim. (wxd)	Art. no.
1600 x 900 mm	E0.9016.31
2000 x 900 mm	E0.9020.31





ERGO-Budget packing table, low


with shelf, roll holder and rear-table cutting tool for roll material 125/150 cm wide, high version, low version, surface load 200 kg


Dim. (wxd)	Art. no.
1600 x 900 mm	E1.9016.31
2000 x 900 mm	E1.9020.31

Dimensions (mm):












ERGO-Light 2



ERGO-Light 2, basic frame

with electric motor, height-adjustable from 720 – 1220 mm, surface load 200 kg, max. body load 100 kg

Dim. (wxd)	Art. no.
1250 x 750 mm	09.1275.51
1600 x 750 mm	09.1675.51
2000 x 750 mm	09.2075.51



Control unit

Up/down function plus 3 different memory positions with display

Art. no.	
L0.2020.00	



Clamp protection for ERGO-Light 2

visual element, colour RAL 7016 anthracite grey

Dim. (wxd)	Art. no.
745 x 515 mm	09.3275.02

Worktops can be found on p. 56/57.



Thanks to its wide adjustment range, the ERGO-Light 2 is ideal as a sit/stand workstation. The table can be used in a variety of ways in the fields of logistics, transport, assembly and research and development. A wide range of accessories leaves almost nothing to be desired.



Dimensions (mm): Including 30 mm thick worktop External dimensions 1250/1600/2000 Clear width 1050/1400/1800 Depth 750 1000/1450/1780 750

Accessories



Single drawer lockable

Max. load capacity 20 kg, for table depth 750 mm, colour RAL 7016 anthracite grey

Drawer and pair of guides can be found on page 63.





Castor set for movable table frame

consisting of: 4 castors, 2 of them with brake, raises the table frame by 100/160 mm

	Standard	ESD ESD
Dim.	Art. no.	Art. no.
Ø 75 mm	13.0002.40	13.0002.49
Ø 125 mm	13.0000.40	13.0000.49

NOTE



ESD version

ERGO-Light 2 according to EN 61340-4-1 electrically conductive, surface resistance ≤10⁵ ohms.








Robust construction made of 50 x 80 mm linear units combined with steel base profiles and telescopic upper crossbeam (1150 – 1750 mm). Easy assembly of the lifting columns with click system. High-quality powder coating in RAL 9006 white aluminium.

ERGO-Office

Accessories




ERGO-Office incl. control unit up/down with electric motor, height-adjustable from 620 – 1270 mm, surface load 160 kg, max. lifting speed 40 mm/s, anti-collision system and soft start-stop, RAL 9006 white aluminium

Dim. (wxd)	Art. no.
1250 – 2000 x 750 mm	L0.1230.51



Control unit up/down function plus 3 different memory positions with display

Art. no.
L0.2020.00



cable trayhorizontal, hinged, 144 x 93 mm,
RAL 9006 white aluminium

Dim. (wxdxh)	Art. no.
862 x 144 x 93 mm	L0.2050.00
1262 x 144 x 93 mm	L0.2051.00
1462 x 144 x 93 mm	L0.2052.00

Worktops can be found on p. 56/57.










ERGO-Office

Dimensions (mm): Including 30 mm thick worktop







Acoustic partition with mounting

made of sound-absorbing fleece, grey-mottled, flame retardant according to DIN 4102 (B1), sound insulation class C, 1 cm gap between table top and acoustic wall

Dim. (wxdxh)	Art. no.
1200 x 25 x 500 mm	L0.2060.00
1600 x 25 x 500 mm	L0.2061.00
1800 x 25 x 500 mm	L0.2062.00



Cable routing for free-standing variant


with defined rolling behaviour, consisting of 27 chain links, incl. table mounting and base plate, length approx. 1320 mm, RAL 9005 Jet Black

Art. no.		
L0.2070.00		




PC universal holder for securing to the worktop, load capacity up to 20 kg

Dim. (wxd)	Art. no.
70 – 230 x 330 – 540 mm	00.3510.01

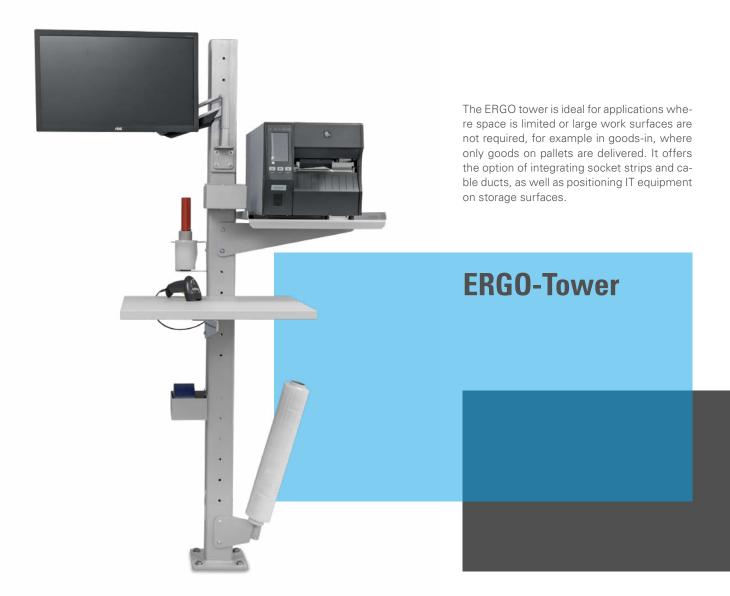

ERGO-Tower


Accessories



ERGO-Tower

dimensions 100×80 mm, L = 1900 mm, base plate 200×160 mm incl. mounting material


Dim. (wxd)	Art. no.
100 x 80 mm	11.1201.20



Shelf 450 x 450 mm

with 3-sided fold, incl. heavy-duty stabiliser, max. load 30 kg

Dim. (wxd)	Art. no.
450 x 450 mm	11.1230.01




Shelf 600 x 450 mm

incl. heavy cantilever and worktop melamine resin coated

Dim. (wxd)	Art. no.
600 x 450 mm	11.1235.01






Socket strip

3-way power outlet T13/Schuko, with plug and socket, Wieland system

	CH	D
Dim. (wxdxh)	Art. no.	Art. no.
200 x 60 x 45 mm	15.2001.00	15.2001.10




Mains cable CH/D, black


Wieland system

	CH	D	D	
Dim.	Art. no.	Art. no.		
3000 mm	15.2004.00	15.2004.10		

The base of the ERGO Tower is a steel tube measuring 100×80 mm, which is mounted on a robust base plate and securely fastened with the help of floor anchors. Continuous perforation at 76 mm intervals on the front and both sides allows for flexible positioning of the standard components.

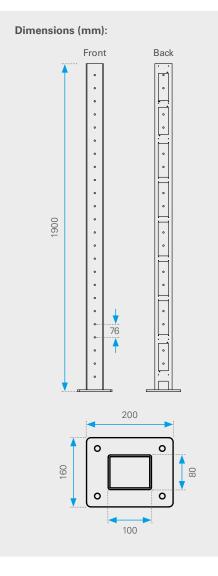


Accessories



Container


dimensions: 138 x 128 x 80 mm

Dim. (wxdxh)	Art. no.
138 x 128 x 80 mm	11.1239.01



Holder hand stretch film L = 400 mm

Dim.	Art. no.
Ø 30 mm	11 1240 01



Novus swivel arm with gas spring incl. mounting plate on free-standing column, VESA 75/100 quick-release fastening

Range/bearing capacity	Art. no.
443 mm/2 – 7 kg	11.1245.01
525 mm/7 – 15 kg	11.1246.01



The ERGO-Mont is used for the assembly of control cabinets and mounting plates. Continuous adjustment of the height and inclination by means of an electric motor enables an ergonomic working position. Side brackets, which can be adjusted without tools, enable the simple fixing of the workpieces.



The ERGO-Mont base frame consists of a solid steel tube construction and four height-adjustable linear units, which can be height-adjusted by 500 mm via an electric motor. The inclination of the worktop can also be adjusted via an electric motor. A telescopic base frame and a flexible mounting system with side brackets facilitate the fixing of mounting plates and control cabinets.

ERGO-Mont 150

Mobile mounting aid, with height and inclination adjustment, overall dimensions $1500 \times 930 \times 810$ mm


Art. no.

B0.7015.51

Overall dimensions (wxdxh)	1500 x 930 x 810 mm
Frame size when retracted (wxd)	1500 x 840 mm
Frame size when extended (wxd)	1500 x 1620 mm
Height adjustment with electric motor	810 – 1310 mm
Adjustment range	500 mm
Adjustable tilt angle	75°
Max. load	200 kg
Castors	4 swivel castors with total lock, Ø 75 mm
Min. dimensions of workpiece (wxh)	300 x 400 mm
Max. dimensions of workpiece (wxh)	1200 x 1800 mm

ERGO-Mont


Accessories



Side bracket

infinitely adjustable and easy to fix with clamping lever, 1 $PU=2\ pcs.$

Dim.	Art. no.
0 – 240 mm	B0.0000.03
210 – 330 mm	B0.0000.04



Support holding plates

robust lower support for switch cabinets, infinitely adjustable and simple fixing with clamping lever, 1 PU=2~pcs.

Dim. (wxh)	Art. no.
55 x 170 mm	B0.0000.53




Battery

for mobile applications, with charge status display, height and tilt adjustment each require one battery

Art. no.

B0.0000.61




Foot tilt protection


Additional set of feet in case inclination is adjusted up to 90°


Art. no.


B0.0000.20



Dimensions (mm):









Worktop melamine coated

30 mm thick, RAL 7035 light grey, with chipboard core, 2 mm ABS edging all round

Application: Standard worktop for normal use and loads



Worktop antistatic melamine coated

30 mm thick, RAL 7035 light grey, with chipboard core volume conductive, 2 mm ABS edging all round

Application: Mainly in the area of laboratory, electric and testing tables



Worktop 0,8 mm HPL coated

30 mm thick, RAL 7035 light grey, with chipboard core, 2 mm ABS edging all round

Application: Standard worktop for higher requirements

Worktops



melamine coated,

Worktops melamine coated

30 mm thick, light grey with ABS edges



ESD melamine coated,

22.2009.28

Worktops with HPL coating 0,8 mm

30 mm thick, light grey with ABS edges





	30 mm thick	antistatic, 30 mm thick
Dim. (wxdxh)	Art. no.	Art. no.
600 x 600 x 30 mm	20.0606.28	22.0606.28
600 x 750 x 30 mm	20.0675.28	22.0675.28
600 x 900 x 30 mm	20.0609.28	22.0609.28
900 x 600 x 30 mm	20.0906.28	22.0906.28
900 x 750 x 30 mm	20.0975.28	22.0975.28
900 x 900 x 30 mm	20.0909.28	22.0909.28
1250 x 600 x 30 mm	20.1206.28	22.1206.28
1250 x 750 x 30 mm	20.1275.28	22.1275.28
1250 x 900 x 30 mm	20.1209.28	22.1209.28
1600 x 600 x 30 mm	20.1606.28	22.1606.28
1600 x 750 x 30 mm	20.1675.28	22.1675.28
1600 x 900 x 30 mm	20.1609.28	22.1609.28
2000 x 600 x 30 mm	20.2006.28	22.2006.28
2000 x 750 x 30 mm	20.2075.28	22.2075.28

	HPL layer 0,8 mm, 30 mm thick	ESD, HPL layer 0,8 mm, antistatic, 30 mm thick
Dim. (wxdxh)	Art. no.	Art. no.
600 x 600 x 30 mm	21.0606.28	23.0606.28
600 x 750 x 30 mm	21.0675.28	23.0675.28
600 x 900 x 30 mm	21.0609.28	23.0609.28
900 x 600 x 30 mm	21.0906.28	23.0906.28
900 x 750 x 30 mm	21.0975.28	23.0975.28
900 x 900 x 30 mm	21.0909.28	23.0909.28
1250 x 600 x 30 mm	21.1206.28	23.1206.28
1250 x 750 x 30 mm	21.1275.28	23.1275.28
1250 x 900 x 30 mm	21.1209.28	23.1209.28
1600 x 600 x 30 mm	21.1606.28	23.1606.28
1600 x 750 x 30 mm	21.1675.28	23.1675.28
1600 x 900 x 30 mm	21.1609.28	23.1609.28
2000 x 600 x 30 mm	21.2006.28	23.2006.28
2000 x 750 x 30 mm	21.2075.28	23.2075.28
2000 x 900 x 30 mm	21.2009.28	23.2009.28



Additional price cut-out section for package weighing scales, e.g. dimensions $400 \times 500 \times 100$ mm, including holder for scales, for all top types and sizes, cut-out section left or right on request

20.2009.28

Table depth	Art. no.
600 mm	20.9000.28
750 mm	20.9001.28
900 mm	20.9002.28

Other dimensions on request.

2000 x 900 x 30 mm

NOTE

Position of cut-out section for package weighing scales

Distance from left or right 180 mm, distance from front 100 mm. Generally 6 mm of air all-round between scales and cut-out. Holder is height adjustable depending on the type of scales.





Worktop antistatic 0,8 mm HPL coated

30 mm thick, RAL 7035 light grey, with chipboard core volume conductive, 2 mm ABS edging all round

Application: Mainly in the area of laboratory, electric and testing tables



Worktop 3,0 mm HPL coated

31 mm thick, RAL 7035 light grey, with chipboard core, 2 mm ABS edging all round

Application: Worktop for the highest loads, very high abrasion resistance and the highest level of scratch resistance



Worktop with stainless steel cover

30 mm thick, with chipboard core, stainless steel turned down over front and rear edges, 2 mm ABS transverse edge

Application: Very high scratch and chemical resistance, surface easy to clean



Worktops with HPL coating 3,0 mm

31 mm thick, light grey with ABS edges



Worktops with stainless steel


30 mm thick, with 1,5 mm layer V2A



Multiplex worktop

Steamed beech veneer, multilayered, waterproof glued, 30, 40 or 50 mm thick, surface oiled

Application: Can be used universally for general work



	Stainless steel layer, 30 mm thick
Dim. (wxdxh)	Art. no.
1250 x 750 x 30 mm	27.1275.28
1250 x 900 x 30 mm	27.1209.28
1600 x 750 x 30 mm	27.1675.28
1600 x 900 x 30 mm	27.1609.28
2000 x 750 x 30 mm	27.2075.28
2000 x 900 x 30 mm	27.2009.28



Worktop in solid beech

Beechwood board solid, lamellae finger-jointed, surface oiled

Application: Can be used universally for general work



Worktops in beech

2500 x 900 mm

30, 40 and 50 mm thick, natural beech, oiled




24.2509.50

Production in accordance with DIN EN ISO 9001

NOTE


Cutting mat wanted?


Protect your worktop with a cutting underlay. See p. 74.



ERGO-Basic corner worktop (p. 29)

	1175 x 1175 mm for extension d = 750 mm	1325 x 1325 mm for extension d = 900 mm
	Art. no.	Art. no.
melamine coated, 30 mm thick	20.1111.28	20.1313.28
ESD melamine coated, antistatic, 30 mm thick	22.1111.28	22.1313.28
HPL layer, 0,8 mm, 30 mm thick	21.1111.28	21.1313.28
HPL layer, 0,8 mm, antistatic, 30 mm thick	23.1111.28	23.1313.28
HPL layer, 3,0 mm, 31 mm thick	26.1111.28	26.1313.28
Beech multiplex, 30 mm thick	24.1111.30	24.1313.30
Beech solid, 50 mm thick	25.1111.50	25.1313.50






Spacer between perforated profile sections for double workstations

Depth = 60 mm, including fixing material

	2 perforated profile sections		3 perforated profile section	ons
	1340 mm	1740 mm	650 mm	850 mm
	Art. no.	Art. no.	Art. no.	Art. no.
melamine coated, 30 mm thick	20.1300.28	20.1700.28	20.0600.28	20.0800.28
ESD melamine coated, antistatic, 30 mm thick	22.1300.28	22.1700.28	22.0600.28	22.0800.28
Beech multiplex, 30 mm thick	24.1300.30	24.1700.30	24.0600.30	24.0800.30
Beech multiplex, 50 mm thick	24.1300.50	24.1700.50	24.0600.50	24.0800.50
Beech solid, 50 mm thick	25.1300.50	25.1700.50	25.0600.50	25.0800.50



Laboratory riser worktop Depth = 400 mm

	1250 x 400 mm	1600 x 400 mm	2000 x 400 mm
	Art. no.	Art. no.	Art. no.
melamine coated, 30 mm thick	20.1204.28	20.1604.28	20.2004.28
ESD melamine coated, antistatic, 30 mm thick	22.1204.28	22.1604.28	22.2004.28
HPL layer, 0,8 mm, 30 mm thick	21.1204.28	21.1604.28	21.2004.28
HPL layer, 0,8 mm, antistatic, 30 mm thick	23.1204.28	23.1604.28	23.2004.28
HPL layer, 3,0 mm, 31 mm thick	26.1204.28	26.1604.28	26.2004.28
Stainless steel, 30 mm thick	27.1204.28	27.1604.28	27.2004.28
Beech multiplex, 30 mm thick	24.1204.30	24.1604.30	24.2004.30
Beech solid, 50 mm thick	25.1204.50	25.1604.50	25.2004.50





melamine coated, 30 mm thick



coated, antistatic, 30 mm thick




ESD melamine HPL layer, 0,8 mm, 30 mm thick



31 mm thick

(7) HPL layer, Beech multiplex, 30 mm thick 3,0 mm,





Shelf for ERGO-Basic (p. 35)

Table (wxd)	Art. no.				
600 x 600 mm	20.0505.BA	22.0505.BA	21.0505.BA	26.0505.BA	24.0505.BA
600 x 750 mm	20.0506.BA	22.0506.BA	21.0506.BA	26.0506.BA	24.0506.BA
600 x 900 mm	20.0575.BA	22.0575.BA	21.0575.BA	26.0575.BA	24.0575.BA
900 x 600 mm	20.0805.BA	22.0805.BA	21.0805.BA	26.0805.BA	24.0805.BA
900 x 750 mm	20.0806.BA	22.0806.BA	21.0806.BA	26.0806.BA	24.0806.BA
900 x 900 mm	20.0875.BA	22.0875.BA	21.0875.BA	26.0875.BA	24.0875.BA
1250 x 600 mm	20.1105.BA	22.1105.BA	21.1105.BA	26.1105.BA	24.1105.BA
1250 x 750 mm	20.1106.BA	22.1106.BA	21.1106.BA	26.1106.BA	24.1106.BA
1250 x 900 mm	20.1175.BA	22.1175.BA	21.1175.BA	26.1175.BA	24.1175.BA
1600 x 600 mm	20.1505.BA	22.1505.BA	21.1505.BA	26.1505.BA	24.1505.BA
1600 x 750 mm	20.1506.BA	22.1506.BA	21.1506.BA	26.1506.BA	24.1506.BA
1600 x 900 mm	20.1575.BA	22.1575.BA	21.1575.BA	26.1575.BA	24.1575.BA
2000 x 600 mm	20.1905.BA	22.1905.BA	21.1905.BA	26.1905.BA	24.1905.BA
2000 x 750 mm	20.1906.BA	22.1906.BA	21.1906.BA	26.1906.BA	24.1906.BA
2000 x 900 mm	20.1975.BA	22.1975.BA	21.1975.BA	26.1975.BA	24.1975.BA



Side shelf for ERGO-Basic (p. 35)/ ERGO-Vario Plus (p. 41)

ERGO-Basic

Dim. (wxd)	Art. no.				
450 x 600 mm	20.0406.BS	22.0406.BS	21.0406.BS	26.0406.BS	24.0406.BS
450 x 750 mm	20.0475.BS	22.0475.BS	21.0475.BS	26.0475.BS	24.0475.BS
450 x 900 mm	20.0409.BS	22.0409.BS	21.0409.BS	26.0409.BS	24.0409.BS

ERGO-Vario Plus

Dim. (wxd)	Art. no.				
450 x 750 mm	20.0475.BS	22.0475.BS	21.0475.BS	26.0475.BS	24.0475.BS


ERGO-Flex



Shelf for ERGO-Flex (p. 43)

Table (wxd)	Art. no.				
1250 x 750 mm	20.1005.FL	22.1005.FL	21.1005.FL	26.1005.FL	24.1005.FL
1600 x 750 mm	20.1405.FL	22.1405.FL	21.1405.FL	26.1405.FL	24.1405.FL
2000 x 750 mm	20.1805.FL	22.1805.FL	21.1805.FL	26.1805.FL	24.1805.FL

ERGO-Forte




Shelf for ERGO-Forte (p. 45)

Table (wxd)	Art. no.				
1250 x 750 mm	20.1005.FA	22.1005.FA	21.1005.FA	26.1005.FA	24.1005.FA
1250 x 900 mm	20.1006.FA	22.1006.FA	21.1006.FA	26.1006.FA	24.1006.FA
1600 x 750 mm	20.1405.FA	22.1405.FA	21.1405.FA	26.1405.FA	24.1405.FA
1600 x 900 mm	20.1406.FA	22.1406.FA	21.1406.FA	26.1406.FA	24.1406.FA
2000 x 750 mm	20.1805.FA	22.1805.FA	21.1805.FA	26.1805.FA	24.1805.FA
2000 x 900 mm	20.1806.FA	22.1806.FA	21.1806.FA	26.1806.FA	24.1806.FA











Step 1: Drawer housing



Step 2: Drawer



Step 3: Pair of guides

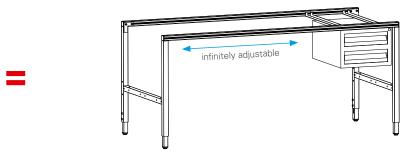

Drawers




Single drawer lockable

load capacity max. 20 kg, for table depth 600/750/900 mm



Dim. (wxdxh)	Art. no.
330 x 486 x 108 mm	00.4000.02


A pair of guides also needs to be ordered for each drawer housing.



Drawer housing, empty

usable height 200 mm, for table depth 750/900 mm

		Standard	ESD 4	SD.
	Dim. (wxdxh)	Art. no.	Art. no.	
	411 x 572 x 283 mm	00.4001.02	00.4001.09	




Drawer housing, empty

usable height 300 mm, for table depth 750/900 mm

S		Standard	ESD S	
	Dim. (wxdxh)	Art. no.	Art. no.	
	411 x 572 x 383 mm	00.4002.02	00.4002.09	

Housing and drawers in RAL 7016 anthracite grey.



Pair of guides to secure the drawer

fits all drawer types


Depth	600 mm	750 mm	900 mm
Table frame	Art. no.	Art. no.	Art. no.
ERGO-Basic	00.3606.01	00.3675.01	00.3609.01
ERGO-Vario	_	00.3675.01	_
ERGO-Vario Plus	-	03.3675.01	_
ERGO-Flex	_	00.3675.01	_
ERGO-Forte	-	00.3675.01	00.3609.01
ERGO-Light 2	-	09.3675.01	-



Drawer unit movable, empty

4 castors Ø 100 mm, 2 of them with brake, incl. grooved mat, black, and push handle, usable height 450 mm, total height 723 mm


	Standard	ESD 4	_
Dim. (wxdxh)	Art. no.	Art. no.	
411 x 572 x 723 mm	00.4003.42	00.4003.49	



Drawer with full pull-out 100%

Dimensions 306 x 459 mm, load capacity 75 kg, incl. single drawer lock, right side


		Standard	ESD SES
Front height	Usable height	Art. no.	Art. no.
h = 50 mm	32,5 mm	00.4100.02	00.4100.09
h = 75 mm	57,5 mm	00.4101.02	00.4101.09
h = 100 mm	82,5 mm	00.4102.02	00.4102.09
h = 150 mm	132,5 mm	00.4103.02	00.4103.09
h = 200 mm	182,5 mm	00.4104.02	00.4104.09
h = 300 mm	282,5 mm	00.4105.02	00.4105.09



Plastic insert box, red

8 insert boxes: 75 x 75 mm 4 insert boxes: 75 x 150 mm 2 insert boxes: 150 x 150 mm


Front height	Art. no.
50 mm	00.4260.00
75 mm	00.4261.00



Diaphragm walls and partition plates

2 Diaphragm walls: 27 E 6 Partition plates: 6 E

Front height	Art. no.
50 mm	00.4210.00
75 mm	00.4211.00
100 mm	00.4212.00
150 mm	00.4213.00




Diaphragm walls and partition plates

1 diaphragm wall: 27 E 2 partition plates: 9 E

Front height	Art. no.
50 mm	00.4220.00
75 mm	00.4221.00
100 mm	00.4222.00
150 mm	00.4223.00
200 mm	00.4224.00
300 mm	00.4225.00

Table width 2000 mm

1750 mm



Grid widths for an overall table width of 2000 mm

2 x 860 or 1 x 1750 mm

Table width 1600 mm





Grid widths for an overall table width of 1600 mm

2 x 660 or 1 x 1350 mm

Table width 1250 mm



Grid widths for an overall table width of 1250 mm

1 x 660, 1 x 860 or 1 x 1040 mm

Add-on units

The vertical perforated profile sections form the base for the add-on units to the tables. Dividing into two sub-areas helps when accommodating the tools and auxiliary equipment on the workstation, which are becoming increasingly larger.

Example: The monitor and keyboard on the left are somewhat higher, with the label printer on the right easily reachable a little bit lower. See p. 15.

Adjustment steps for plugged-in and screwed components.

Perforated profile sections

The perforated profile sections are always fitted via two securing points and provide a sturdy base. The lengths of the perforated profile sections can be selected as follows according to needs:



1000 mm long = low add-on unit, e.g. for perforated panels (see p. 75)




1450 mm long = medium-high add-on unit, various trays without add-on unit for lighting fixture or carton divider shelf





1780 mm long = high add-on unit with carton divider shelf or cantilever arm for lighting fixture




1990 mm long = high add-on unit with carton divider shelf or cantilever arm for lighting fixture







Add-on units



Perforated profile section 60/30 for add-on units hole spacing 30:30 mm

Dim.	Art. no.
1000 mm	11.0100.01
1450 mm	11.0145.01
1780 mm	11.0178.01
1990 mm	11.0199.01
2500 mm	11.0250.01
Fixing kit for double table	11.0000.50



Attachment for perforated profile

for screwing to the worktop, incl. fixing material

Dim.	Art. no.
130 x 50 mm	11.1010.01



Cantilever arm including 30/30 aluminium profile length 670 mm

Dim.	Art. no.
700 mm	11.1007.02

Back board



Aluminium profile rail for suspending lights etc.

including 2 end stops


Dim.	Art. no.
1200 mm	11.1120.01
1500 mm	11.1150.01
1900 mm	11.1190.01



Back board for overall table width

90 mm overlap

Dim.	Art. no.
600 mm	10.2006.01
900 mm	10.2009.01
1250 mm	10.2012.01
1600 mm	10.2016.01
2000 mm	10.2020.01



Back board between columns

90 mm overlap

Dim.	Art. no.
655 mm	10.2106.01
855 mm	10.2108.01
1040 mm	10.2110.01
1340 mm	10.2113.01
1740 mm	10.2117.01


Cable duct



Cable duct for overall table width

usable height 70 mm, for socket strip (see p. 93)

Dim.	Art. no.	
1250 mm	10.2212.01	
1600 mm	10.2216.01	
2000 mm	10 2220 01	



Cable duct between columns

usable height 70 mm, for socket strip (see p. 93)

Dim.	Art. no.
655 mm	10.2306.01
855 mm	10.2308.01
1040 mm	10.2310.01
1340 mm	10.2313.01
1740 mm	10.2317.01






Shelves



Simple shelf straight and 25° tiltable, load capacity up to 20 kg


Dim.	Art. no.
660 x 210 mm	11.0121.11
860 x 210 mm	11.0221.11
660 x 270 mm	11.0127.11
860 x 270 mm	11.0227.11



Shelf with screwed bracket

tilting angle 0°, 15° and 30°, load capacity up to 40 kg

Dim.	Art. no.
660 x 270 mm	11.0127.21
860 x 270 mm	11.0227.21
1040 x 270 mm	11.0327.21



Shelf with screwed bracket

tilting angle 0°, 15° and 30°, load capacity up to 40 kg

Dim.	Art. no.
660 x 400 mm	11.0140.21
860 x 400 mm	11.0240.21
860 x 600 mm	11.0260.21



File support for shelf with bracket

depth 270 mm

Dim.	Art. no.
270 x 200 mm	11.9009.01




Rubber mat finely ribbed


	Standard	ESD 🔝
Dim.	Art. no.	Art. no.
660 x 210 mm	11.9001.00	11.9001.09
860 x 210 mm	11.9002.00	11.9002.09
660 x 270 mm	11.9003.00	11.9003.09
860 x 270 mm	11.9004.00	11.9004.09
1040 x 270 mm	11.9029.00	11.9029.09
660 x 400 mm	11.9005.00	11.9005.09
860 x 400 mm	11.9006.00	11.9006.09
400 x 400 mm	11.9007.00	11.9007.09
860 x 600 mm	11.9008.00	11.9008.09





Simple shelf:



Shelf with screwed bracket:







Shelves

Dim.


650 x 590 mm

850 x 590 mm

1040 x 590 mm

1340 x 590 mm

1740 x 590 mm



Carton divider shelf incl. divider elements with heavy bracket, load capacity up to 50 kg

Art. no.

11.0159.31

11.0259.31

11.0359.31

11.0459.31

11.0559.31

div. elements

4

5

6

5		


Carton divider shelf movable incl. divider elements 4 castors Ø 100 mm, 2 of them with brake, height 165 mm, load capacity up to 50 kg

Dim.	Art. no.	div. elements
650 x 590 mm	10.0159.41	4
850 x 590 mm	10.0259.41	5
1040 x 590 mm	10.0359.41	5
1340 x 590 mm	10.0459.41	6
1740 x 590 mm	10.0559.41	8



Movable shelf without divider elements 4 castors \varnothing 100 mm, 2 of them with brake, height 165 mm, load capacity up to 50 kg

Dim.	Art. no.
650 x 590 mm	10.0159.45
850 x 590 mm	10.0259.45
1040 x 590 mm	10.0359.45
1340 x 590 mm	10.0459.45
1740 x 590 mm	10.0559.45



Carton divider shelf without divider elements with heavy bracket, load capacity up to 50 kg

1		3	
Ū	I	U	

Dividers	element for	carton	divider	shelf
standard	and enacial of	202		




Dividers for carton	divider shelf
made of aluminium	

Dim.	Art. no.
650 x 590 mm	11.0159.35
850 x 590 mm	11.0259.35
1040 x 590 mm	11.0359.35
1340 x 590 mm	11.0459.35
1740 x 590 mm	11.0559.35

Dim.	Art. no.
560 x 345 mm 1	11.9050.01
560 x 500 mm (2)	11.9051.01
560 x 210 mm 3	11.9052.01

Dim.	Art. no.	
590 x 345 mm	11.9054.01	
590 x 500 mm	11.9055.01	



Pair of brackets heavy

for shelf and carton divider shelf

Dim.	Art. no.
360 x 100 mm	11.0000.32




Shelves



Shelf with heavy bracket

load capacity up to 50 kg

Dim.	Art. no.
650 x 400 mm	11.0140.31
850 x 400 mm	11.0240.31
1040 x 400 mm	11.0340.31
1340 x 400 mm	11.0440.31
1740 x 400 mm	11.0540.31



Heavy shelf with screwed bracket

inclination 0°, 15° and 30°, load capacity 50 kg


Dim.	Art. no.
650 x 400 mm	11.0140.41
850 x 400 mm	11.0240.41
1040 x 400 mm	11.0340.41
1340 x 400 mm	11.0440.41
1740 x 400 mm	11.0540.41



Back board for shelf

with heavy bracket, 30 mm overlap


Dim.	Art. no.
650 mm	11.4006.01
850 mm	11.4008.01
1040 mm	11.4010.01
1340 mm	11.4013.01
1740 mm	11.4017.01





File support for shelf with heavy bracket depth 400 mm

Dim.	Art. no.
400 x 250 mm	11.9009.02

Dimensions (mm):





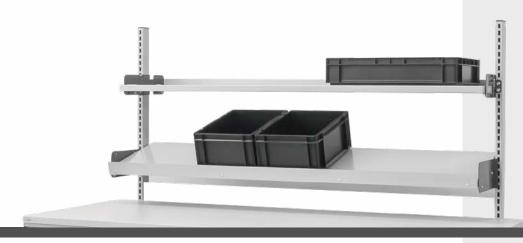


Swivel arm accessories




Basic 2-piece, with three joints swivel radius 640 mm, capacity max. 15 kg

Radius	Art. no.
640 mm	11.6000.01




Complete with tiltable shelf

Shelf area	Art. no.
400 x 400 mm	11.6003.01
400 x 600 mm	11.6004.01




Complete with monitor holder and keyboard/mouse shelf pivotable

Art. no.	
11.6002.01	




Complete with Multi attachment

Art. no.
11 6010 01




Type 1 complete including perforated panel 660 x 370 mm

Art. no.	
11.6011.01	




Type 2 complete including 3 suspension rails, length 660 mm

Art. no.	
11.6012.01	




Type 3 complete including 2 single shelves 660 x 210 mm

Art.	no.		
11.60	013.01		



Type 4 complete including 2 shelves with screwed brackets 660 x 270 mm

Art. no.
11.6014.01



Type 5 complete including 1 shelf with screwed brackets 660 x 400 mm


Art. no.
11.6015.01








EDP accessories




Keyboard shelf for hooking onto a shelf d = 400 mm

Shelf area (wxd)	Art. no.
181 v 150 mm	10 9028 01



Keyboard pull-out shelf with separate mouse shelf pivotable, external: $553 \times 400 \times 110$ mm, 100 % extendable

Shelf area (wxd)	Art. no.
520 x 365 mm	10.9029.01



Pull-out shelf 100% extendable for label printers etc., max. bearing capacity 50 kg

Shelf area (wxdxh)	Art. no.
350 x 408 x 60 mm	10.9040.01
500 x 408 x 60 mm	10.9042.01



Swivel arm 1-piece

complete with monitor holder VESA standard, bearing capacity 15 kg


Radius	Art. no.
300 mm	11.6101.01



Swivel arm 2-piece

complete with monitor holder VESA standard, bearing capacity 15 kg

Radius	Art. no.
600 mm	11.6001.01



Pivotable keyboard/mouse shelf to fit swivel arm

variable height

Shelf area (wxd)	Art. no.
484 x 150 mm	11.6102.01




PC universal holder for securing to the worktop, load capacity up to 20 kg

Dim. (wxd)	Art. no.
70 – 230 x 330 – 540 mm	00.3510.01



PC holder for ERGO-Basic


Dim. (wxd)	Art. no.
200 x 440 mm	00.3500.01



PC holder for ERGO-Forte/ERGO-Vario Plus


Dim. (wxd)	Art. no.
200 x 440 mm	04.3500.01





Universal shelf on perforated profile section bearing capacity max. 30 kg

Dim. (wxd)	Art. no.
420 x 520 mm	10.9041.01



NOVUS TSS column

table mount with system clamp, length 545 mm


Board thickness	Art. no.
14 – 40 mm	11.6050.01
5 – 70 mm	11.6051.01



Holder on perforated profile for folding arm

including fastening clips, also suitable for double workstations


Length	Art. no.
445 mm	11.6053.01
890 mm	11.6054.01



NOVUS TFC folding arm

for securing to the column or holder on the perforated profile, infinitely adjustable, VESA 75/100 Quick-fit fastener

Range/bearing capacity	Art. no.
450 mm/10 kg 1	11.6055.01
505 mm/15 kg 2	11.6056.01
705 mm/10 kg 3	11.6057.01
Spacer plate H = 6 mm	11.6079.01



NOVUS Clu monitor mount

height adjustment with gas pressure spring, VESA bracket 75/100 mm incl. bracket on column

Range/bearing capacity	Art. no.
443 mm/2 – 7 kg	11.6070.01
525 mm/7 – 15 kg	11.6071.01



NOVUS TSS notebook holder

for securing to the TSS column or holder on the perforated profile, infinitely adjustable, load capacity up to 10 kg

Shelf area (wxd)	Art. no.
404 x 288 mm	11.6062.01



NOVUS TSS keyboard holder


can be rotated and swivelled 45°, shelf area (wxd) 640 x 172 mm

Range	Art. no.
528 mm	11.6060.01
728 mm	11.6061.01




NOVUS Thin Client holder attachment to TSS column or between VESA mounting bracket (100 x 100 mm) and monitor, PC width 35 – 53 mm, max. bearing capacity 7,5 kg

Dim.	Art. no.
125 x 132 mm	11.6065.01

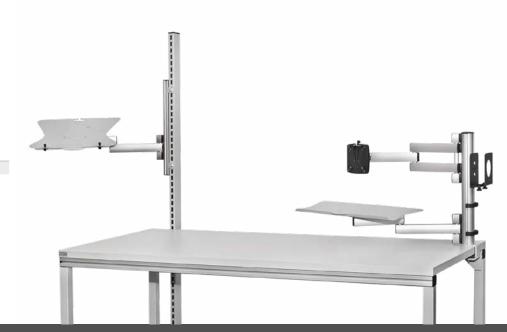

Accessories for worktops



Cutting mat transparent

for cutting without leaving marks, with a grid printed on one side

Dim. (wxdxh)	Art. no.
900 v 600 v 3 mm	11 9025 01

Accessories for weighing scales



Holder for weighing scales display

including column mount

Dim. (wxd)	Art. no.
248 x 200 mm	11 9013 01



Additional price cut-out section for package weighing scales, e.g. dimensions $400 \times 500 \times 100$ mm, incl. holder for scales, for all top types and sizes, cut-out section left or right on request

Table depth	Art. no.
600 mm	20.9000.28
750 mm	20.9001.28
900 mm	20.9002.28

Other dimensions on request.

Other versions on request.

Cantilever arm accessories



Spring balancer

Die-cast aluminium housing, steel cable diameter 2 mm, 1,6 m cable travel, infinitely adjustable

Bearing capacity	Art. no.
0,4 - 1,0 kg	11.9019.00
1,0 – 2,0 kg	11.9020.00
2.0 - 3.0 kg	11.9021.00



Plastic guide for aluminium profile rail

for attaching spring balancer

Art. no. 11.9015.10





Supports and holders




Supports and holders



Suspension rail for attaching open storage boxes (see p. 77)


straight and 25° tiltable

Dim.	Art. no.
660 mm	11.2106.11
860 mm	11.2108.11
1040 mm	11.2110.11



Perforated panel for attaching tool holders

Dim.	Art. no.
660 x 370 mm	11.2006.11
860 x 370 mm	11.2008.11
1040 x 370 mm	11.2010.11
1350 x 370 mm	11.2013.11
1750 x 370 mm	11.2017.11



Label holder

for label shelf up to \varnothing 180 mm, including 5 divider elements

Dim.	Art. no.
660 mm	11.2306.11
860 mm	11.2308.11
1040 mm	11.2310.11



Divider element for label holder, individual

Art. no.
11.2301.



Suspension device for chip material

can be swivelled 360°, max. 2500 mm high





Pourer with bracket and chip bag mount

Art. no.

Open storage boxes for suspension rail

Length 660 mm

Box size $\underline{102} \times 90 \times 50 \text{ mm} = 6 \text{ items}$ Box size $\underline{105} \times 170 \times 75 \text{ mm} = 6 \text{ items}$ Box size $\underline{150} \times 230 \times 125 \text{ mm} = 4 \text{ items}$

Length 860 mm

Box size $\underline{102} \times 90 \times 50 \text{ mm} = 8 \text{ items}$ Box size $\underline{105} \times 170 \times 75 \text{ mm} = 8 \text{ items}$ Box size $\underline{150} \times 230 \times 125 \text{ mm} = 5 \text{ items}$


Length 1040 mm

Box size $\underline{102} \times 90 \times 50 \text{ mm} = 9 \text{ items}$ Box size $\underline{105} \times 170 \times 75 \text{ mm} = 9 \text{ items}$ Box size $\underline{150} \times 230 \times 125 \text{ mm} = 6 \text{ items}$




Open storage boxes, see p. 77.

Dimensions of suspension device (mm):



Universal holders



Universal holder including column mount with support plate to fit a document holder, electrical and compressed air components

Dim.	Art. no.
90 x 250 mm	11.9010.01



Column mount individual adjustable in 30:30 mm increments

Art. no.	
11.9011.01	



Document holder with 10 x A4 document sleeves for attaching to the universal holder

	Standard	magnetic
Dim. (wxh)	Art. no.	Art. no.
230 x 320 mm	11.9012.01	11.9012.11

Miscellaneous



Bottle holder for attaching to a perforated profile section or perforated panel

Dim.	Art. no.
Ø 90 mm	11.9045.01




Adhesive tape dispenser holder for attaching to a perforated profile section or perforated panel

Dim. (wxdxh)	Art. no.
108 x 148 x 70 mm	11.9046.01





Container accessories



Open storage boxes made of polypropylene

* including bracket for attaching to the suspension rail, see p. 75

	Standard blue	ESD black
Dim. (wxdxh)	Art. no.	Art. no.
102 x 90 x 50 mm *	15.0001.00	15.0001.09
105 x 170 x 75 mm *	15.0002.00	15.0002.09
150 x 230 x 125 mm *	15.0003.00	15.0003.09
213 x 330 x 150 mm	15.0004.00	15.0004.09



Polypropylene Euro containers

bottom and side walls closed, stackable

	Standard grey	black
Dim. (wxdxh)	Art. no.	Art. no.
300 x 400 x 120 mm	15.0005.00	15.0005.09
300 x 400 x 175 mm	15.0006.00	15.0006.09
300 x 400 x 210 mm	15.0009.00	15.0009.09
400 x 600 x 120 mm	15.0007.00	15.0007.09
400 x 600 x 210 mm	15.0008.00	15.0008.09



Waste container movable

4 castors Ø 100 mm


Dim. $(wxdxh)$	Art. no.
600 x 800 x 555 mm	10.9000.40



Multipurpose PP container


60 L, Dim. 280 x 555 x 585 mm (wxdxh), impact resistant and easy to clean, colour: grey, optional trolley with 4 swivel castors, ground clearance 65 mm, dark grey

	Art. no.
Container	15.0200.00
Trolley	15.0201.00



Multi-purpose container with side bracket for ERGO-Basic

	Art. no.
Container with holder	15.0205.00



Multi-purpose container with holder underneath table


with guide rail, extendable

	ENGO-Dasic	Vario Plus
Depth	Art. no.	Art. no.
600 mm	15.0206.00	-
750 mm	15.0207.00	15.0209.00
900 mm	15.0208.00	-

EPCO Pasia EPCO




Mail sorting system




Add-on unit empty

1 row, 2 compartments



Add-on unit empty


1 row, 3 compartments



Add-on unit empty

1 row, 4 compartments

Dim. (wxdxh)	Art. no.	Dim. (wxdxh)	Art. no.	Dim. (wxdxh)	Art. no.
600 x 400 x 367 mm	10.9100.00	900 x 400 x 367 mm	10.9101.00	1200 x 400 x 367 mm	10.9102.00



Add-on unit empty

1 row, 5 compartments


Dim. (wxdxh)	Art. no.
1500 x 400 x 367 mm	10.9103.00



Add-on unit empty

2 rows high, 4 compartments


Dim. (wxdxh)	Art. no.
600 x 400 x 715 mm	10.9105.00



Add-on unit empty

2 rows high, 6 compartments


Dim. (wxdxh)	Art. no.
900 x 400 x 715 mm	10.9106.00



Add-on unit empty

2 rows high, 8 compartments

1200 x 400 x 715 mm 10.9107.00	Dim. (wxdxh)	Art. no.
	1200 x 400 x 715 mm	10.9107.00




Add-on unit empty

2 rows high, 10 compartments

Dim. (wxdxh)	Art. no.
1500 x 400 x 715 mm	10.9108.00

Stacking height with evenly spaced slide-in shelves or trays (mm):

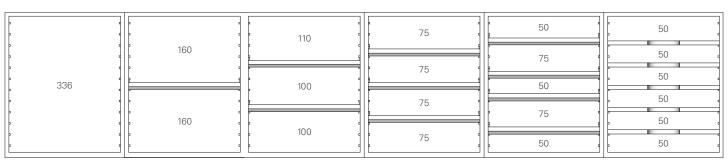

Module, empty 1 slide-in shelf 2 slide-in shelves 3 slide-in shelves 4 slide-in shelves 5 trays



Accessories for mail sorting system



Art. no.


10.9150.00

Sliding shelf

Internal dim. (wxdxh)

273 x 390 x 20 mm

colour light grey, labelling material 2 3



Drawers

colour light grey, internal dimensions 252 x 355 mm (wxd), labelling material \bigcirc

Dim. (height)	Art. no.
21 mm (12 drawers)	10.9155.00
49 mm (6 drawers)	10.9160.00
77 mm (4 drawers)	10.9165.00



Dividing plate vertical


Dim. (height)	Art. no.
170 mm	10.9170.00



Labelling material

Sleeves with paper strips, 10 items per bag

Dim.	Art. no.
85 x 9 mm 1	10.9175.00
85 x 13 mm (2)	10.9176.00
261 x 13 mm (3)	10.9177.00











Chairs - Neon











Flex strip

available in four colours

Colours
Happy orange
Mars green

Ocean blue Cool grey



Neon work chair with glides

height adjustable with gas spring from 450 - 620 mm, synchronisation mechanism, without upholstery



	ESD
Variant	Art. no.
Standard	14.0020.00
ESD	14.0020.09



Neon work chair with castors

height adjustable with gas spring from 450 - 620 mm, synchronisation mechanism, without upholstery



Variant	Art. no.
Standard	14.0021.00
ESD	14.0021.09



Neon work chair with glides and step-up aid height adjustable with gas spring from 590 – 870 mm, synchronisation mechanism, without upholstery



Variant	Art. no.
Standard	14.0022.00
ESD	14.0022.09



Neon integral foam upholstery

Black

can be fitted subsequently, seat height + 20 mm





Neon Duotec textile up

Colour

Blue

Black

can be fitted subsequer mm

Standard

14.0040.00

14.0041.00

Art. no.

pho	lste	ry			
ntly,	seat	height	+	20	r

ESD	A Paris
Art. no.	

14.0040.09

14.0041.09

Neon Supertec can be fitted subsequently, seat height + 20 mm

	Standard	ESD	ESO
Colour	Art. no.	Art. no.	
Blue	14.0050.00	-	
Black	14.0051.00	-	

Neon: Contact backrest with seat inclination adjustment



14.0031.09

Chairs - Nexxit

Nexxit: Contact backrest with seat inclination adjustment



Handles – available in five colours







Blue - 3277

Grey - 3278

Orange - 3279







Green - 3280

Black (ESD) - 3218

Handleless -3001



Nexxit work chair with glides

contact backrest, seat height adjustment range from 450 – 600 mm



Nexxit work chair with castors

contact backrest, seat height adjustment range from 450 – 600 mm



Nexxit work chair with glides and foot ring

contact backrest, seat height adjustment range from 570 – 820 mm

	Standard	ESD
Cover	Art. no.	Art. no.
Duotec fabric	14.0060.00	14.0060.09
Magic synthetic leather	14.0061.00	14.0061.09
Integral foam (PU)	14.0062.00	14.0062.09
Supertec	14.0063.00	14.0063.09

	Standard	ESD A
Cover	Art. no.	Art. no.
Duotec fabric	14.0065.00	14.0065.09
Magic synthetic leather	14.0066.00	14.0066.09
Integral foam (PU)	14.0067.00	14.0067.09
Supertec	14.0068.00	14.0068.09

	Standard	ESD 4
Cover	Art. no.	Art. no.
Duotec fabric	14.0070.00	14.0070.09
Magic synthetic leather	14.0071.00	14.0071.09
Integral foam (PU)	14.0072.00	14.0072.09
Supertec	14.0073.00	14.0073.09



Chairs fully assembled

supplied in protective cover

Art. no.

14.0999.00



Manufacturer's warranty

10-year warranty for all chairs, standing aids and stools, including pneumatic springs and mechanisms.



Standing aids/stools



Standing aid Fin

comfortable seat made of soft-touch PU foam in black, aluminium frame, gas spring height adjustment 660 – 930 mm



Variant	Art. no.
Standard	14.0000.00
ESD	14.0000.09



Industrial standing aid

integral foam cover in black, ultra-flat disc base, adjustable seat inclination, 360° rotation, gas spring height adjustment 650 – 850 mm



Variant	Art. no.
Standard	14.0300.00
ESD	14.0300.09



Industrial standing aid with footrest

integral foam cover in black, foldable frame in black, adjustable seat inclination, 360° rotation, ratchet mechanism height adjustment 640 – 840 mm

Standard 14.0310.0	00



Allround stool 2 with castors

imitation leather cover in black, steel cruciform base in black, release ring, seat height 460 – 630 mm

Variant	Art. no.
Imitation leather	14.0200.00



Work stool Flex 1 with castors

cover made of soft-touch PU foam in black, plastic cruciform base in black, gas spring height adjustment $450-650\ \text{mm}$

Variant	Art. no.
Soft-touch PU foam	14.0210.00





Free-standing footrest, ESD

height adjustable in 30:30 mm increments, footrest can be tilted to any angle

Dim.	Art. no.
500 x 350 mm	00.3300.01







The positive effect of floor mats in the workplace is undisputed, whether you opt for an economical anti-fatigue mat made of PUR or a high-quality ergonomic mat. Standing for long periods of time on hard, unheated concrete floors places strain on the musculoskeletal system and causes fatigue. Ergonomic floor mats increase well-being, provide motivation and boost performance.

Floor mats



PUR anti-fatigue mat - the economical one









Accessories



Ergopurtec with round pastilles

for dry standing workstations, height 13 mm, bevelled outer edge, polyurethane, colour black

	Standard	ESD A
Dim.	Art. no.	Art. no.
960 x 660 mm	15.5020.00	15.5020.09
1260 x 660 mm	15.5022.00	15.5022.09
1860 x 660 mm	15.5024.00	15.5024.09



for dry standing workstations, height 13 mm, bevelled outer edge, polyurethane, colour black

	Standard	ESD SSS
Dim.	Art. no.	Art. no.
960 x 660 mm	15.5030.00	15.5030.09
1260 x 660 mm	15.5032.00	15.5032.09
1860 x 660 mm	15.5034.00	15.5034.09

ESD earthing cable with push button for type EL

	CH	D	
	Art. no.	Art. no.	
ESD earthing cable	15.5059.09	15.5059.19	

Special sizes on request.

Special sizes on request.



ADVANTAGES:

The multi-functional ergonomic mat with the ARG seal of quality


- Shock-absorbing effect reduces symptoms of fatigue
- Comfortable rubber mat for dry and wet workstations
- High-quality material protects against detrimental cold floors
- High resistance to slipping and rolling up (mat weight approx. 20 kg)

New - Ergolastec Vario

- Bright and high-quality workstation mat
- Very easy to clean wipeable surface
- Easily turned, on account of the new surface
- Dissipative design ESD

Dimensions (mm):

Ergolastec Basic/Vario:



NOTE



ESD floor mats


Rubber mat according to EN 61340-4-1 electrically conductive, surface resistance $\leq 10^5$ ohms.

Ergonomic mat with seal of approval











Standard

15.5060.00

15.5061.00

15.5062.00

15.5065.00

15.5063.00

15.5066.00

Art. no.

ESD

Art. no.

15.5060.09

15.5061.09

15.5062.09

15.5065.09

15.5063.09

15.5066.09







Ergolastec Basic for dry workplaces,	Ergolastec Vario for dry workplace
height 16 mm, bevelled outer edge,	height 16 mm, bevelled outer edge
new rubber compound black, hardness	new rubber compound light grey, h
55 Shore A, 5-year warranty	Shore A, 5-year warranty

Dim.

1000 x 650 mm

1000 x 1000 mm

1350 x 1000 mm

1500 x 1000 mm

1750 x 1000 mm

1900 x 1000 mm

	Standard	ESD
Dim.	Art. no.	Art. no.
1000 x 650 mm	15.5070.00	15.5070.09
1000 x 1000 mm	15.5071.00	15.5071.09
1350 x 1000 mm	15.5072.00	15.5072.09
1500 x 1000 mm	15.5075.00	15.5075.09
1750 x 1000 mm	15.5073.00	15.5073.09
1900 x 1000 mm	15.5076.00	15.5076.09

Special sizes on request.

Ergolastec Vario for dry workplaces, height 16 mm, bevelled outer edge, new rubber compound anthracite, hardness 55 Shore A, 5-year warranty

	Standard	ESD 🏭
Dim.	Art. no.	Art. no.
1000 x 650 mm	15.5080.00	15.5080.09
1000 x 1000 mm	15.5081.00	15.5081.09
1350 x 1000 mm	15.5082.00	15.5082.09
1500 x 1000 mm	15.5085.00	15.5085.09
1750 x 1000 mm	15.5083.00	15.5083.09
1900 x 1000 mm	15.5086.00	15.5086.09

Special sizes on request.

Special	sizes	on	request
----------------	-------	----	---------



- Robust aluminium housing, natural, anodized
- Dimmable as standard, incl. memory function
- Light colours available in 4000/5000/6500 Kelvin
- Anti-glare with microprismatic lens and diffuser foil
- 230 V connection with Wieland plug-in system, 3 m cable, black

Lighting

LED system lights

					СН	D
Designation	Dimensions	LED output	Emax. 1 metre	Light colour	Art. no.	Art. no.
LED system lighting S1	35 x 111 x 585 mm	16 W	1118 Lux	5000 Kelvin	15.1030.00	15.1030.10
LED system lighting S2	35 x 111 x 870 mm	24 W	1534 Lux	5000 Kelvin	15.1031.00	15.1031.10
LED system lighting S3	35 x 111 x 1150 mm	32 W	1843 Lux	5000 Kelvin	15.1032.00	15.1032.10
LED system lighting S4	35 x 111 x 1435 mm	40 W	2052 Lux	5000 Kelvin	15.1033.00	15.1033.10

Colour rendering index CRI > 80 according to ASR A3.4, lifetime 72'000 h (L80/B10), protection class IP 20



Cable fix set for hole profiles 5-piece set for mounting to hole profile, incl. cable ties

Art. no.		
15.1041.00		



Cable fix set for 30 x 30 aluminum profiles Set of 5 pieces for attachment to 30 x 30 mm aluminum profile, incl. cable tie

Art. no.		
15.1042.00		



Lamp attachment kit

for attaching to carton divider shelf or shelf, magnetic

Dim.	Art. no.
Ø 40 mm	15.1040.00


See attachment page 89.



Attached to <u>aluminium profile rail</u> for general grid widths




Attached to carton divider shelf or shelf



Attachment kit 15.1040.00







Bracket for lamp, swivelling angle bracket for optimal positioning of the lamp



LED-RLL PRO ring magnifier lamp



21 LEDs arranged in a ring for uniform, shadow-free light

LED cover made of impact-resistant polycarbonate

Ring magnifier lamp with articulated arm LED-RLL PRO 8 W round lens \varnothing 120 mm, 5000 Kelvin/CRI > 90, incl. power supply with Euro plug, screw-on flange 60 x 60 mm

	Art. no.
RLL PRO 3 dioptres	15.1050.00
RLL PRO 5 dioptres	15.1051.00
RLL PRO 3 ESD diopters	15.1050.09
RLL PRO 5 ESD diopters	15.1051.09

LED-RLL MASTER ring magnifier lamp









LED segments, switchable to 3 light scenes:

- All segments; uniform area light
- Left and right segment; to emphasize structures
- Rear segment; oblique light with strong shadow formation

Ring magnifier lamp, silver/black, 48xLED-RLL MASTER

5300 Kelvin/CRI > 90, infinitely dimmable, 3 light scenes, biconvex glass lens, Ø 150 mm, incl. power plug and screw-on flange 60 x 60 mm

	CH D	
	Art. no.	Art. no.
Master 3 dioptres	15.1052.00	15.1052.10
Master 6 dioptres	15.1053.00	15.1053.10



LED articulated arm lamps



LED 12 W articulated arm lamp

Lamp head width 350 mm, arm length 380 + 445 mm, with microprismatic lens and PET diffuser lens, incl. power cord and screw-on flange 60 \times 60 mm

	CH	D
Light colour	Art. no.	Art. no.
5000 Kelvin	15.1061.00	15.1061.10



LED 24 W articulated arm lamp

Lamp head width 585 mm, arm length 380 + 445 mm, infinitely dimmable, with microprismatic lens and PET diffuser lens, incl. power cord and screw-on flange 60 \times 60 mm

	CH	D
Light colour	Art. no.	Art. no.
5000 Kelvin	15.1063.00	15.1063.10

Colour rendering index CRI > 80, lifetime 72,000 h (L80/B10)



Brackets



Bracket for lights

incl. mounting hardware

	Art. no.
Perforated profile section bracket	15.1005.09
Clamp 0 = 85 mm	15 1006 09

NOTE

- 3D joint on lamp head for large adjustment range
- Robust friction joint arm made of aluminium, with spring support in the centre and foot joint







- Robust aluminium housing, natural, anodized
- Electric lifting element for lifting and lowering objects
- Optimal for high cardboard boxes and heavy products up to 80 kg
- Stroke range can be individually adjusted
- With integrated scale on request

NOTE

N.B.:

When a lifting element is located next to an ERGO-Basic table, a perforated panel must be attached to the neighbouring table subframe at all times – risk of getting jammed!

Lifting element

Lifting element electric for raising and lowering high boxes, work surface with rollers for extra-light handling, top edge of work surface can be adjusted manually.

Lifting element



Electric lifting element with roller conveyor

Dimensions: $710 \times 910 \times 850 \text{ mm (wxdxh)}$ Worktop: $710 \times 670 \text{ mm (wxd)}$

Top stop: 820 mm

Bottom stop: 370 mm

Stroke range: Max. 450 mm

Lifting weight: 80 kg

Stroke speed: 120 mm/sec.

Operation: Incl. up/down footswitch

Mains voltage: 230 V 50 Hz

Art. no. 12.1000.01



Electric lifting element with chrome steel surface finish

Dimensions: $710 \times 910 \times 850 \text{ mm (wxdxh)}$

Worktop: $710 \times 670 \text{ mm (wxd)}$

Top stop: 800 mm

Bottom stop: 350 mm

Stroke range: Max. 450 mm

Lifting weight: 80 kg

Lifting weight: 80 kg

Stroke speed: 120 mm/sec.

Operation: Incl. up/down footswitch

Mains voltage: 230 V 50 Hz

Art. no.




Lifting element superstructure cladding

 $670 \times 220 \times 720$ mm (wxdxh), RAL 9006 white aluminium

Art. no. 12.1000.10


Power accessories



Suspension rail for attaching electrical components

can be attached in 30:30 mm increments


Dim.	Art. no.
660 mm	11.2206.11
860 mm	11.2208.11
1040 mm	11.2210.11



Socket strip

3-way power outlet T13/Schuko, with plug and socket, Wieland system


	CH	D
Dim. (wxdxh)	Art. no.	Art. no.
200 x 60 x 45 mm	15.2001.00	15.2001.10



Connecting cable, black

with plug and socket, Wieland system

Dim.	Art. no.
500 mm	15.2005.00
3000 mm	15.2006.00
5000 mm	15.2007.00





Mains cable CH/D, black


Wieland system

	СН	D
Dim.	Art. no.	Art. no.
3000 mm	15.2004.00	15.2004.10















Base frames/transport trolleys

ERGO-line table frames generally always feature a RAL 9006 white aluminium dissipative powder coating (see matrix on page 24/25).



Drawer units

Matching drawer units made of powder-coated sheet steel, including dividers (see page 62).




Worktops

Dissipative worktops with volumeconductive core and 2 mm ABS edges, manufactured according to DIN EN ISO 9001 guidelines (see pages 56 to 59).



Chairs

High-quality work chairs, standing aids, and stools with various surfaces, for a well-furnished ESD workstation (see pages 82 to 84).



Add-on units

The ERGO-line add-on units, just like the table frames, always have a dissipative powder-coating and are conductive throughout.




ESD accessories

Complete range of equipment to convert a standard workstation into an ESD workstation. Table covering, earth bonding plug, wrist strap, and spiral cable.



Floor mats

Standing workstations are supplemented with ergonomic floor mats, also in a dissipative design (see page 86).



Container

Transparent storage box for hanging rails or shelves. Euro containers in a black ESD design, for storage shelves or transport trolleys (see page 77).



SURFACES



All table frames, accessories and transport trolleys are powder coated in dissipative paint, according to IEC 61340-5-1.

ESD workstations. All steel parts feature a standard dissipative powder coating (table frames and add-on units). Drawer units, chairs, containers and floor mats in a dissipative design complete the range.

ERGO-line has many years of experience in the manufacture of

ESD protection made easy

ESD accessories



ESD work mats

resistant to chemicals and drops of solder, 2 mm thick, with 10 mm snap fastener connector


Dim.	Art. no.
610 x 910 mm	15.3000.09
610 x 1220 mm	15.3001.09



ESD earthing module

3 snap fastener connectors 10 mm, each with 1 MOhm protective resistor, for earthing on the table frame

Art. no.	
15.3002.09	



Earthing plug, 2,5 m earth cable

with snap fastener or eyelet and connected plug, 1 MOhm protective resistor

	CH	D
Dim.	Art. no.	Art. no.
2,5 m	15.3005.09	15.3005.19



ESD wrist strap

elastic, adjustable, with 10 mm snap fastener connector

Art. no. 15.3003.09



ESD spiral cable

with 10 mm snap fasteners on each side, 1 MOhm protective resistor each, 2,0 m

Art. no. 15.3004.09

NOTE

Each ESD workstation is equipped with an earthing plug art. no. 15.3005.09/19 and grounded to a power socket via the same.



Material supply is a crucial issue on the workstation. ERGO-line offers the most varied options depending on the size and quantity of the material. Optimum positioning saves valuable space and reduces distances for order picking. This results in time saving and increased productivity.



- Maximum flexibility for material supply
- Accessories compatible, everything in the same grid widths
- For the use of Euro containers and open storage boxes
- Equipped with angle brackets and/or roller tracks
- ESD version as standard

Feed/material supply

All components are height adjustable in 30:30 mm increments and can be tilted to the desired position.

The required material in the right place in the right quantity.



Feed/material supply

The feeder shelves are height adjustable in 30:30 mm increments and can be moved to the desired position. All feet are provided with levelling screws to compensate for uneven areas. System width of 1350 mm for the use of 3 Euro containers each with a width of 400 mm, or 2 Euro containers 600 mm wide.

Material supply according to the FIFO principle. The basic frame can be positioned as a central material supply unit or also immediately behind the workstation. Two basic elements can also be placed behind each other where needed.



Accessories for single feeder



Feeder shelf

bearing capacity max. 100 kg/shelf, height and inclination angle adjustable as desired

Dim. (wxd)	Art. no.
1350 x 1300 mm	16.1010.00



Angle brackets for feeder

can be used as lateral end pieces or for fitting Euro containers, 2 in a set

Dim.	Art. no.
1300 mm	16.2004.00



Roller track for feeder

for easy conveyance of Euro containers and open storage boxes, including support tray, 2 in a set


	Standard	ESD ESD
Dim.	Art. no.	Art. no.
1300 mm	16.2023.00	16.2023.09



Angle stop for feeder shelf

serves as front stop, galvanised


Art. no.
16.2050.00




Basic frame for feeder bearing capacity max. 500 kg, including 4 levelling feet


Dim. (wxdxh)	Art. no.	
1410 x 1270 x 2010 mm	16.0010.00	

Dimensions (mm):






Trolley 4 basic



Trolley 4 basic

Trolley with grid width of 860 mm, 1040 mm and 1350 mm, 4 castors Ø 125 mm, 2 of them with brake

	Standard	ESD A
Dim. (wxdxh)	Art. no.	Art. no.
923 x 910 x 1670 mm	12.0416.41	12.0416.49
1103 x 910 x 1670 mm	12.1416.41	12.1416.49
1413 x 910 x 1670 mm	12.2416.41	12.2416.49



Accessories can be found on p. 101.



Depending on the size and weight of the containers, the frames for the feeder can be mounted directly on the add-on units or, with an additional element, on the add-on units of the work table.

The feeders can be secured to all table frames at a uniform height. Height adjustable versions with rear add-on unit on request.



Feed/material supply



Feeder accessories secured to table



Angle brackets for feeder

can be used as lateral end pieces or for fitting Euro containers, 2 in a set

Dim.	Art. no.
400 mm	16.2001.00
639 mm	16.2002.00
900 mm	16.2003.00
1300 mm	16.2004.00



Feeder shelf

bearing capacity max. 100 kg/shelf, height and inclination angle adjustable as desired

Width	660 mm	860 mm	1350 mm	1750 mm
Dim. (Depth)	Art. no.	Art. no.	Art. no.	Art. no.
400 mm	16.1020.00	16.1030.00	16.1040.00	16.1050.00
639 mm	16.1021.00	16.1031.00	16.1041.00	16.1051.00
900 mm	16.1022.00	16.1032.00	16.1042.00	16.1052.00
1300 mm	16.1023.00	16.1033.00	16.1043.00	16.1053.00



Roller track for feeder for easy conveyance of Euro containers and open storage boxes, including support tray, 2 in a set


	Standard	ESD ESD
Dim.	Art. no.	Art. no.
639 mm	16.2021.00	16.2021.09
900 mm	16.2022.00	16.2022.09
1300 mm	16.2023.00	16.2023.09



Angle stop for feeder shelf

serves as front stop, galvanised


Art. no. 16.2050.00




Basic frame for feeder bearing capacity max. 500 kg, including 2 levelling feet


Dim. (wxdxh)	Art. no.
910 x 720 x 2010 mm	16.0021.00
1410 x 720 x 2010 mm	16.0023.00


Dimensions of feeder on table (mm): For description of add-on units, see p. 64.





Dimensions of feeder free-standing (mm): Can be combined with trolley, see p. 114/115.










Free-standing add-on units offer a cost-effective alternative to a table. E.g. when the conveyor equipment already exists and you simply want to incorporate a packing process. Different grid widths can be combined with other as needed.

Free-standing add-on units


The side sections with the 60 x 30 mm perforated profile are identical to the perforated profiles sections for the addon units to the tables. The consistent grid widths 660/860/1040/1350/1750 mm also make it possible to use all components of the ERGO-line workstation

Free-standing add-on unit



Side sections with perforated profiles including 2 levelling feet and fixing anchor

	simple	double
Dim.	Art. no.	Art. no.
1090 mm	11.0100.20	_
1540 mm	11.0145.20	_
1870 mm	11.0178.20	_
2080 mm	11.0199.20	11.0199.30




Cross-connector

two items required per field

	Basic frame	Ext. frame
Grid width	Art. no.	Art. no.
660 mm	11.2506.11	11.2506.21
860 mm	11.2508.11	11.2508.21
1040 mm	11.2510.11	11.2510.21
1350 mm	11.2513.11	11.2513.21
1750 mm	11.2517.11	11.2517.21


Shelves



Carton divider shelf incl. divider elements

with heavy bracket, load capacity up to 50 kg


Dim.	Art. no.	div. elements
650 x 590 mm	11.0159.31	4
850 x 590 mm	11.0259.31	5
1040 x 590 mm	11.0359.31	5
1340 x 590 mm	11.0459.31	6
1740 x 590 mm	11.0559.31	8



Shelf with heavy bracket

load capacity up to 50 kg

Dim.	Art. no.
650 x 400 mm	11.0140.31
850 x 400 mm	11.0240.31
1040 x 400 mm	11.0340.31
1340 x 400 mm	11.0440.31
1740 x 400 mm	11.0540.31




Back board for shelf

with heavy bracket, 30 mm overlap

Dim.	Art. no.
650 mm	11.4006.01
850 mm	11.4008.01
1040 mm	11.4010.01
1340 mm	11.4013.01
1740 mm	11.4017.01


EDP accessories



Pull-out shelf 100% extendable

for label printers etc., max. bearing capacity 50 kg


Shelf area (wxdxh)	Art. no.
350 x 408 x 60 mm	10.9040.01
500 x 408 x 60 mm	10.9042.01




Keyboard pull-out shelf with separate mouse shelf pivotable, external: $553 \times 400 \times 110$ mm, 100 % extendable

Shelf area (wxd)	Art. no.
520 x 365 mm	10.9029.01

Dimensions (mm):






Power accessories



Suspension rail for attaching electrical components

can be attached in 30:30 mm increments

Dim.	Art. no.
660 mm	11.2206.11
860 mm	11.2208.11
1040 mm	11.2210.11



Socket strip

3-way power outlet T13/Schuko, with plug and socket, Wieland system


	CH	D
Dim. (wxdxh)	Art. no.	Art. no.
200 x 60 x 45 mm	15.2001.00	15.2001.10

Further accessories can be found on p. 66.




Free-standing add-on unit






Dim.	Art. no.
1090 mm	11.0100.20
1540 mm	11.0145.20
1870 mm	11.0178.20
2080 mm	11.0199.20



Cross-connector two items required per field

	Basic frame	Ext. frame
Grid width	Art. no.	Art. no.
660 mm	11.2506.11	11.2506.21
860 mm	11.2508.11	11.2508.21
1040 mm	11.2510.11	11.2510.21
1350 mm	11.2513.11	11.2513.21
1750 mm	11.2517.11	11.2517.21





Perforated panel for attaching tool holders

Dim.	Art. no.
660 x 930 mm	11.2016.11
860 x 930 mm	11.2018.11
1040 x 930 mm	11.2020.11



Dimensions (mm):





The free-standing add-on units can be used for many different applications. In the version with the perforated panels, we also offer a broad range of hooks and accessories. The self-supporting panels can be used as visual protection or partitions. Different grid widths can be combined with other as needed.

Free-standing add-on units with perforated panel

The side sections with the 60 x 30 mm perforated profile are identical to the perforated profiles sections for the add-on units to the tables. The consistent grid widths 660/860/1040/1350/1750 mm also make it possible to use all components of the ERGO-line workstation system.

Hooks



Tool holder with vertical hook end

Dim.	Diameter Ø	Art. no.
35 mm	6 mm	11.8040.01
75 mm	6 mm	11.8040.02
125 mm	6 mm	11.8040.03



Dual tool holder with vertical hook end

Dim.	Diameter Ø	Art. no.
35 mm	6 mm	11.8041.01
50 mm	6 mm	11.8041.02
75 mm	6 mm	11.8041.03
150 mm	6 mm	11.8041.04



Tool holder with oblique hook end

Dim.	Diameter Ø	Art. no.
50 mm	6 mm	11.8042.01
100 mm	6 mm	11.8042.02
150 mm	6 mm	11.8042.03
200 mm	6 mm	11.8042.04



Tool holder with straight spike, single

Dim.	Diameter Ø	Art. no.
50 mm	6 mm	11.8044.01
100 mm	6 mm	11.8044.02
150 mm	6 mm	11.8044.03



Dual tool holder with straight spike

Dim.	Diameter Ø	Art. no.
50 mm	6 mm	11.8045.01
100 mm	6 mm	11.8045.02
150 mm	6 mm	11.8045.03



Oblique hook for spanner sockets and socket wrenches

Dim.	Diameter Ø	Art. no.
14/40 mm	6 mm	11.8046.01



Pipe bracket, also for hoses, cables, etc.

Dim.	Diameter Ø	Art. no.
35 mm	60 mm	11.8047.01
35 mm	100 mm	11.8047.02



Tool clip, single, small base plate

Diameter Ø	Art. no.
6 mm	11.8048.01
10 mm	11.8048.02
13 mm	11.8048.03
16 mm	11.8048.04
19 mm	11.8048.05



Double tool clip

Diameter Ø	Art. no.
6 mm	11.8049.01
10 mm	11.8049.02
13 mm	11.8049.03
16 mm	11.8049.04
19 mm	11.8049.05



Magnetic holder

Diameter Ø	Art. no.
40 mm	11 8050 01



Rounded holder

Dim. (wxd)	Art. no.
65 x 25 mm	11.8051.01





Saw holder (please order in pairs)

For:	Art. no.
4 saws	11 8052 01

Hooks



Tool clip, single, large base plate

Diameter Ø	Art. no.
25 mm	11.8053.01
28 mm	11.8053.02
32 mm	11 8053 03



Pliers holder

Dim. (wxd)	Art. no.
35 x 20 mm	11.8054.01
55 x 20 mm	11.8054.02
75 x 20 mm	11.8054.03



Machine tool holder

Diameter Ø	Art. no.
40 mm	11.8055.01
60 mm	11.8055.02
80 mm	11.8055.03





Base plate for individual solutions

Dim.	Art. no.
small	11.8056.01
large	11.8056.02



Tool holder for self-service packaging

Dim. (wxd)	Art. no.
125 x 30 mm	11.8057.01



Tool holder, six pronged

Dim. (wxd)	Art. no.
140 x 240 mm	11.8058.01



Tool holder, three pronged

Dim. (wxd)	Art. no.
150 x 45 mm	11.8059.01



Cable holder with hook end 50 mm tall

Dim. (wxd)	Art. no.
150 x 37 mm	11.8060.01
200 x 37 mm	11 8060 02



Combination holder, 2 pieces

Dim. (wxd)	Art. no.
150 x 55 mm	11.8061.01



Wrench holder horizontal for 8 wrenches, depth 150 mm

Dim. (hxw)	Art. no.
50 v 130/60 mm	11 8062 01



Wrench holder vertical for 10 wrenches, depth 50 mm

Dim. (hxw)	Art. no.
220 x 75/145 mm	11.8063.01



Ring wrench holder vertical for 10 wrenches, depth 50 mm

Dim. (hxw)	Art. no.
255 v 125/225 mm	11.8064.01

Hooks



Bit holder, for 7 bits

Dim. (wxd)	Art. no.
150 x 35 mm	11.8065.01



Screwdriver holder

height 40 mm, width 200/390 mm, depth 30 mm

For:	Art. no.
6 pieces	11.8066.01
12 pieces	11.8066.02



Allen key/drill holder (various Ø mm)

height 35 mm, width 200/390 mm, depth 30 mm

For:	Art. no.
14 pieces	11.8067.01
28 pieces	11.8067.02



Allen key holder for 9 keys Ø 1 – 11 mm

Dim. (wxh)	Art. no.
200 x 50/70 mm	11.8068.01



Socket holder for 12 sockets

Dim. (wxh)	Art. no.
390 x 30 mm	11.8069.01



Can holder

with Ø 70 mm, width 100/300 mm

For:	Art. no.
1 can	11.8070.01
3 cans	11.8070.02



Tool holder for MK-2 and MK-3

height 85 mm, width 395 mm, depth 60 mm

Dim.	Art. no.
MK-2 (15 x Ø 17 mm)	11.8071.01
MK-3 (12 x Ø 23 mm)	11.8071.02



Shelf

Dim. (wxd)	Art. no.
350 x 125 mm	11.8072.01
445 x 150 mm	11.8072.02



Open storage box holder, for boxes 105 mm wide

For:	Length	Art. no.
5 boxes	550 mm	11.8073.01
9 boxes	990 mm	11.8073.02



Open storage box holder, for boxes 102 mm wide

For:	Length	Art. no.
5 boxes	550 mm	11.8074.01
9 boxes	990 mm	11.8074.02



Open storage box holder, single, for box width 102/105 mm

For:	Art. no.
1 box	11.8075.01



Tool holder for custom drilling

Dim. (wxd)	Art. no.
120 x 45 mm	11.8076.01
390 x 45 mm	11.8076.02

Hooks



Hose holder

Dim. (wxd)	Art. no.
230 x 125 mm	11.8077.01



Hanging hooks for perforated panel

Set	Art. no.
10-pieces	11.9022.00
12-pieces	11.9023.00
15-pieces	11.9024.00
18-pieces	11.9025.00
28-pieces	11.9026.00
40-pieces	11.9027.00



Clamping piece holder for round piping

width 55 mm/Ø 19 mm, aluminium colours

Art.	no.
11.80	078.01



Coil frame with axle diameter of up to 17 mm

width max. 78 mm/Ø 170 mm, aluminium colours

Art. no.		
11.8079.01		



Paper roll holder

core $\ensuremath{\mathcal{Q}}$ min. 22 mm, max. roll width 295 mm, aluminium colours

Dim. (hxwxd)	Art. no.	
120 x 355 x 100 mm	11.8081.01	



Tool holder box with wooden board

for custom drilling, mounting: $320 \times 135 \times 55$ mm, aluminium colours

Art. no.	
11.8082.01	



 $50 \times 500 \times 80 \text{ mm}$ (hxwxd), aluminium colours

Art. no.

11.8080.01

Holder for cans and bottles

Storage box

For:

8 pieces

 $55 \times 320 \times 135$ mm (hxwxd), aluminium colours

Ar	t.	no.		
11	01	200	Λ1	



Waste bag holder 2-piece

above $350 \times 305 \times 130$ mm (hxwxd), below $305 \times 300 \times 120$ mm (hxwxd), aluminium colours

Art. no. 11.8084.01

NOTE

The entire range of hooks is not suitable for the ESD area.









Trolleys

Trolley 1

Trolley 2

Trolley in sturdy tubular steel design with 60 x 30 mm profile section. The basic frames are available in three different versions, the accessories are identical to those for the table add-on units (see p. 66). Adjustability of the plugged-in or screwed components is in 30:30 mm increments, as for the add-on units.

Of course, the basic frames also serve as the basis for your own very individual trolley. Please ask our specialist supplier, we will be happy to







The basic trolley comprises 2 side sections, 1 upper and 1 lower cross-connector as well as 1 set of castors. 2 of the 4 castors are equipped with a brake. Special solutions on request.





Trolley 1 basic

Trolley with grid width of 660 mm, 4 castors Ø 125 mm, 2 of them with brake

	Standard	ESD
Dim. (wxdxh)	Art. no.	Art. no.
723 x 413 x 1217 mm	12.0112.41	12.0112.49




Trolley 2 basic

Trolley with grid width of 860 mm, 1040 mm and 1350 mm, 4 castors Ø 125 mm, 2 of them with brake

		Standard	ESD
	Dim. (wxdxh)	Art. no.	Art. no.
	923 x 613 x 1210 mm	12.0212.41	12.0212.49
	1103 x 613 x 1210 mm	12.1212.41	12.1212.49
	1413 x 613 x 1210 mm	12.2212.41	12.2212.49




Customised application




Trolley 3 basic


Trolley with grid width of 860 mm, 1040 mm and 1350 mm, 4 castors \varnothing 125 mm, 2 of them with brake

	Standard	ESD
Dim. (wxdxh)	Art. no.	Art. no.
923 x 613 x 1660 mm	12.0316.41	12.0316.49
1103 x 613 x 1660 mm	12.1316.41	12.1316.49
1413 x 613 x 1660 mm	12.2316.41	12.2316.49






Trolley 1




Trolley 2



Trolley 3

Shelves



Carton divider shelf incl. divider elements

with heavy bracket, load capacity up to 50 kg


Dim.	Art. no.	div. elements
650 x 590 mm	11.0159.31	4
850 x 590 mm	11.0259.31	5
1040 x 590 mm	11.0359.31	5
1340 x 590 mm	11.0459.31	6
1740 x 590 mm	11.0559.31	8



Shelf with heavy bracket

load capacity up to 50 kg

Dim.	Art. no.
650 x 400 mm	11.0140.31
850 x 400 mm	11.0240.31
1040 x 400 mm	11.0340.31
1340 x 400 mm	11.0440.31
1740 x 400 mm	11.0540.31



Back board for shelf

with heavy bracket, 30 mm overlap

Dim.	Art. no.
650 mm	11.4006.01
850 mm	11.4008.01
1040 mm	11.4010.01
1340 mm	11.4013.01
1740 mm	11.4017.01



Suspension rail for attaching open storage boxes


Dim.	Art. no.
660 mm	11.2106.11
860 mm	11.2108.11
1040 mm	11 2110 11



Shelf with screwed bracket

tilting angle 0°, 15° and 30°, load capacity up to 40 kg


Dim.	Art. no.
660 x 270 mm	11.0127.21
860 x 270 mm	11.0227.21
1040 x 270 mm	11 0327 21



Shelf with screwed bracket

tilting angle 0°, 15° and 30°, load capacity up to 40 kg

Dim.	Art. no.
660 x 400 mm	11.0140.21
860 x 400 mm	11.0240.21
860 x 600 mm	11.0260.21




Perforated panel for attaching tool holders

Dim.	Art. no.
660 x 370 mm	11.2006.11
860 x 370 mm	11.2008.11
1040 x 370 mm	11.2010.11
1350 x 370 mm	11.2013.11
1750 x 370 mm	11.2017.11







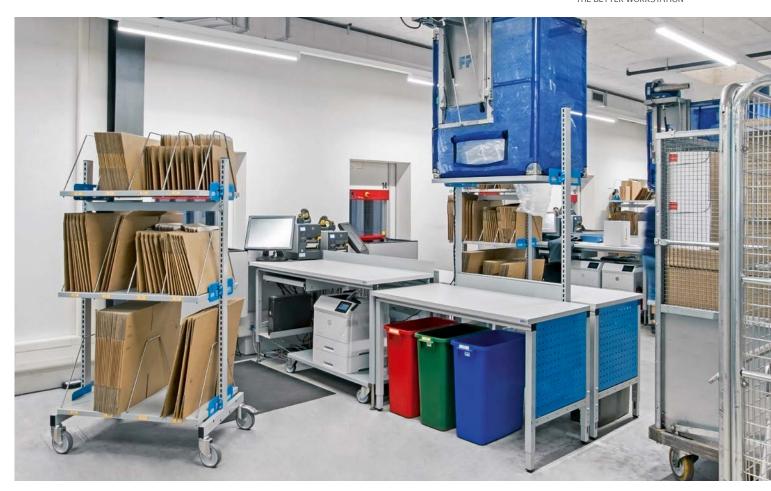







For cutting roll material such as corrugated cardboard, packing paper, PE foam and bubble wrap. Suitable for rolls up to a diameter of 750 mm, a maximum width of 1600 mm and a weight of 150 kg.

Carton divider shelf, shelf, perforated panel and other accessories are compatible with the grid dimensions of the cutting tools. Adjustment steps for plugged-in and screwed components are in 30:30 increments.

Cutting tools



Dispenser movable



Under-table cutting tool



Single cutting tool



Under-table axle support with rear-table cutting tool



Double cutting tool with one cutting frame



Double cutting tool with two cutting frames









Customised application




Dispenser movable Under-table cutting tool




Single cutting tool



Double cutting tool





Single cutting tool, stationary, high for individual assembly




Roll width
750/1000/1250/1500

External dimensions
1100/1410/1560/1810







Cutting tools



Under-table cutting tool movable

up to a roll diameter of 750 mm and 150 kg, 4 castors Ø 125 mm, 2 of them with brake

Maximum roll width	Art. no.
750 mm	13.1007.41
1000 mm	13.1010.41
1250 mm	13.1012.41
1500 mm	13.1016.41



Single cutting tool, stationary

up to a roll diameter of 750 mm and 150 kg

Maximum roll width	Art. no.
750 mm	13.2007.01
1000 mm	13.2010.01
1250 mm	13.2012.01
1500 mm	13.2016.01



Double cutting tool, stationary

with 1 cutting frame up to a roll diameter

Maximum roll width	Art. no.
750 mm	13.3007.01
1000 mm	13.3010.01
1250 mm	13.3012.01
1500 mm	13.3016.01



Double cutting tool, stationary

with 2 cutting frames up to a roll diameter of 750 mm and 150 kg


Maximum roll width	Art. no.
750 mm	13.4007.01
1000 mm	13.4010.01
1250 mm	13.4012.01
1500 mm	13.4016.01



Single cutting tool, stationary, high

for individual assembly with accessories from p. 66, with 1 cutting frame, axle support and axle for a roll diameter of 750 mm

Maximum roll width	Art. no.
750 mm	13.6007.01
1000 mm	13.6010.01
1250 mm	13.6012.01
1500 mm	13.6016.01

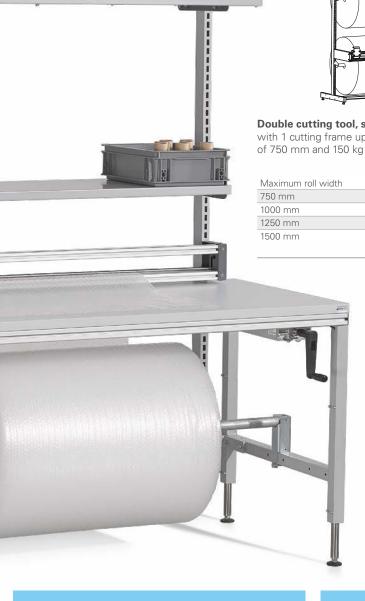





Rear-table cutting tool

for ERGO-line table system, depth 150 mm

Maximum roll width	Art. no.
750 mm	13.5007.01
1000 mm	13.5010.01
1250 mm	13.5012.01
1500 mm	13.5016.01



Dispenser movable

up to a roll diameter of 750 mm and 150 kg, 4 castors \varnothing 125 mm, 2 of them with brake

Maximum roll width	Art. no.
750 mm	13.0007.41
1000 mm	13.0010.41
1250 mm	13.0012.41
1500 mm	13.0016.41



Set of replacement blades

for ERGO-line cutting tool, set of 10 blades

Art. no.		
13.9001.00		





Cone set

for fixing the rolls to the axle, has to be ordered separately for each device

13.9020.00



Rear-table axle support

comprising one set of cantilever arms, I = 400 mm, 1 set of bearing shells infinitely variable, 1 axle Ø 33 mm

Dim.	Art. no.
660 mm	13.8006.01
860 mm	13.8008.01
1040 mm	13.8010.01
1350 mm	13.8013.01
1750 mm	13.8017.01



Axle support between perforated profile

sections comprising one set of axle supports and 1 axle \varnothing 33 mm

Dim.	Art. no.
660 mm	13.7006.01
860 mm	13.7008.01
1040 mm	13.7010.01
1350 mm	13.7013.01
1750 mm	13.7017.01



Castor set for movable cutting tool

comprising 4 castors Ø 125 mm, 2 of them with brake, raises cutting tool by 160 mm

	Standard	ESD ASS
Dim.	Art. no.	Art. no.
Ø 125 mm	13.0000.40	13.0000.49







ERGO-line is a brand of Kern Studer AG

ERGO-line - Germany

Kern Studer GmbH Gewerbering Süd 12 D – 97359 Schwarzach am Main

Telephone +49 9324 97860-0

www.ergo-line.de info@ergo-line.de

ERGO-line - Switzerland DE

Kern Studer AG Weberrütistrasse 9 CH – 8833 Samstagern

Telephone +41 44 783 22 77

www.ergo-line.ch info@ergo-line.ch

ERGO-line - Switzerland FR

Kern Studer SA Champs-Lovats 21 CH – 1400 Yverdon-les-Bains

Telephone +41 24 445 66 00

www.ergo-line.ch contact@ergo-line.ch

Product overview:





Visit our showroom in Schwarzach am Main (DE) or Samstagern (CH).